


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montagehanleiding
Manuel de montage


060:

1 - 6 + 11

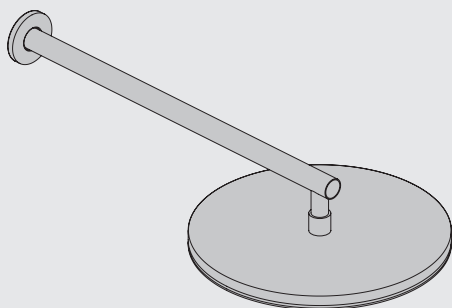

060A:

7 - 11



Data	Bar:	1	2	3	4	5
	(l/min)	12	18	22	25	29
	(Gal/min)	3.4	4.8	5.8	6.6	7.7
Max. 65°C. 150°F						

VR161 - 060, 060A:
 VR161K: 1.8 Gal/min - 7 l/min
 VR161D: 2.5 Gal/min - 9 l/min
 VR161F: 3.7 Gal/min - 14 l/min

VR161K VR161D VR161F

3 + 10

Ø70 mm
Ø2 3/4"

3/4"

80 mm
3 1/8"

Ø286 mm
Ø11 1/4"

060

200: 393 mm
15 1/2"

100: 493 mm
19 1/2"

Std.: 593 mm
23 3/8"

200: 250 mm
9 7/8"

100: 350 mm
13 3/4"

Std.: 450 mm
17 3/4"

1

Ø50 mm
Ø2"

24 mm

VR648

2

3

VR161F: 14 l/min
3.7 Gal/min

4

4 - 8 mm
1/8" - 3/8"

2,5 mm

5



6 + 11

2,5 mm

1 + 2


3 + 4

1

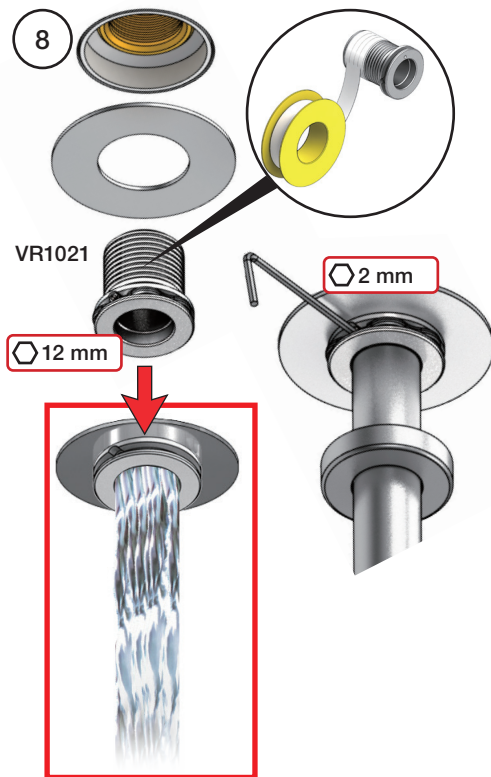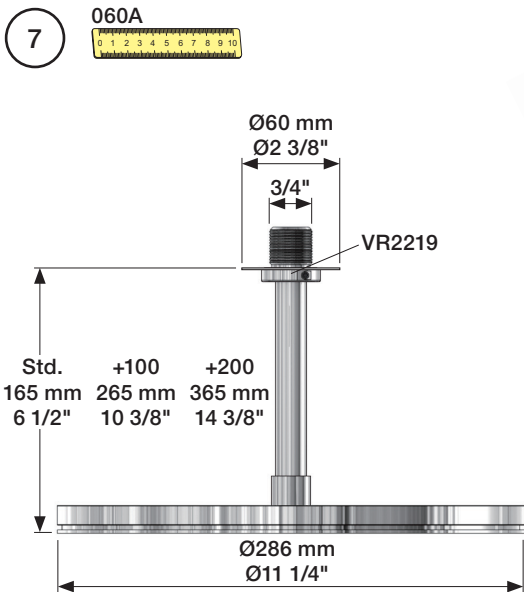


Locking screw
Sicherungsschraube
Sikringsskrue

Fästskruv
Borgschroef
Vis de verrouillage

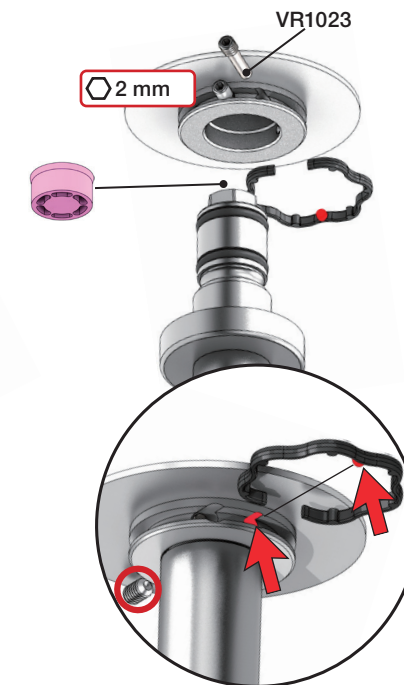

Extension
Verlängerung


T Min. 3 mm
Max. 65 mm



Forlængerdele
Förlängning

Verlængstukken
Modification


Y Min. 48 mm
Max. 110 mm

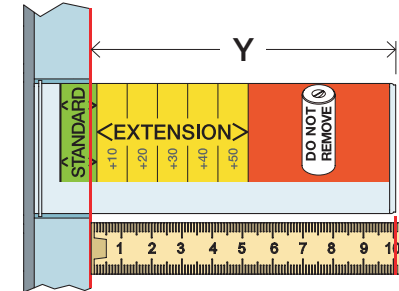



T: VR2219	T: VR648	Y	
3 - 15 mm	3 - 19 mm	110 - 98 mm	Std.
15 - 25 mm	17 - 28 mm	98 - 88 mm	+10
25 - 35 mm	27 - 38 mm	88 - 78 mm	+20
35 - 45 mm	37 - 48 mm	78 - 68 mm	+30
45 - 55 mm	47 - 58 mm	68 - 58 mm	+40
55 - 65 mm	57 - 68 mm	58 - 48 mm	+50




10 060 + 060A: vola Logo

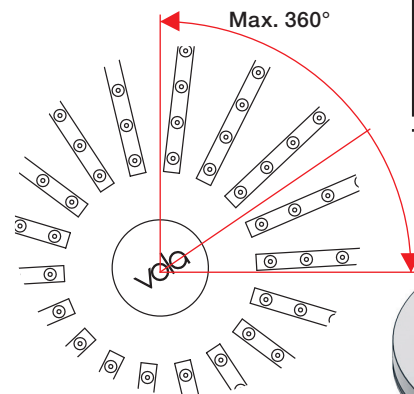


Service - VR556

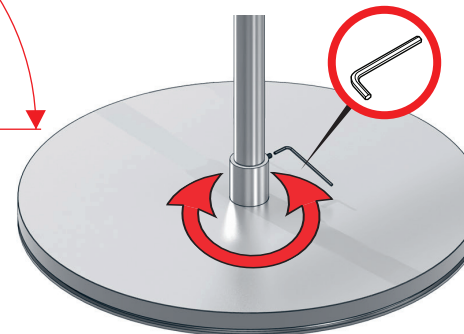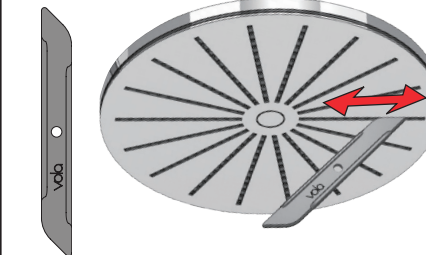


060 - VR648+

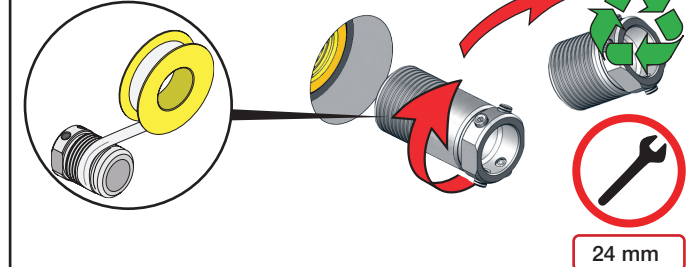

060A - VR2219+

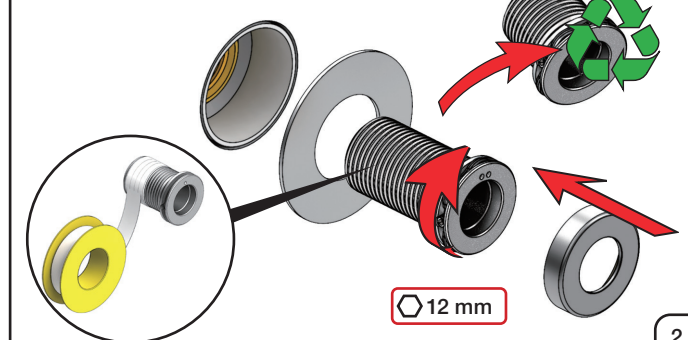

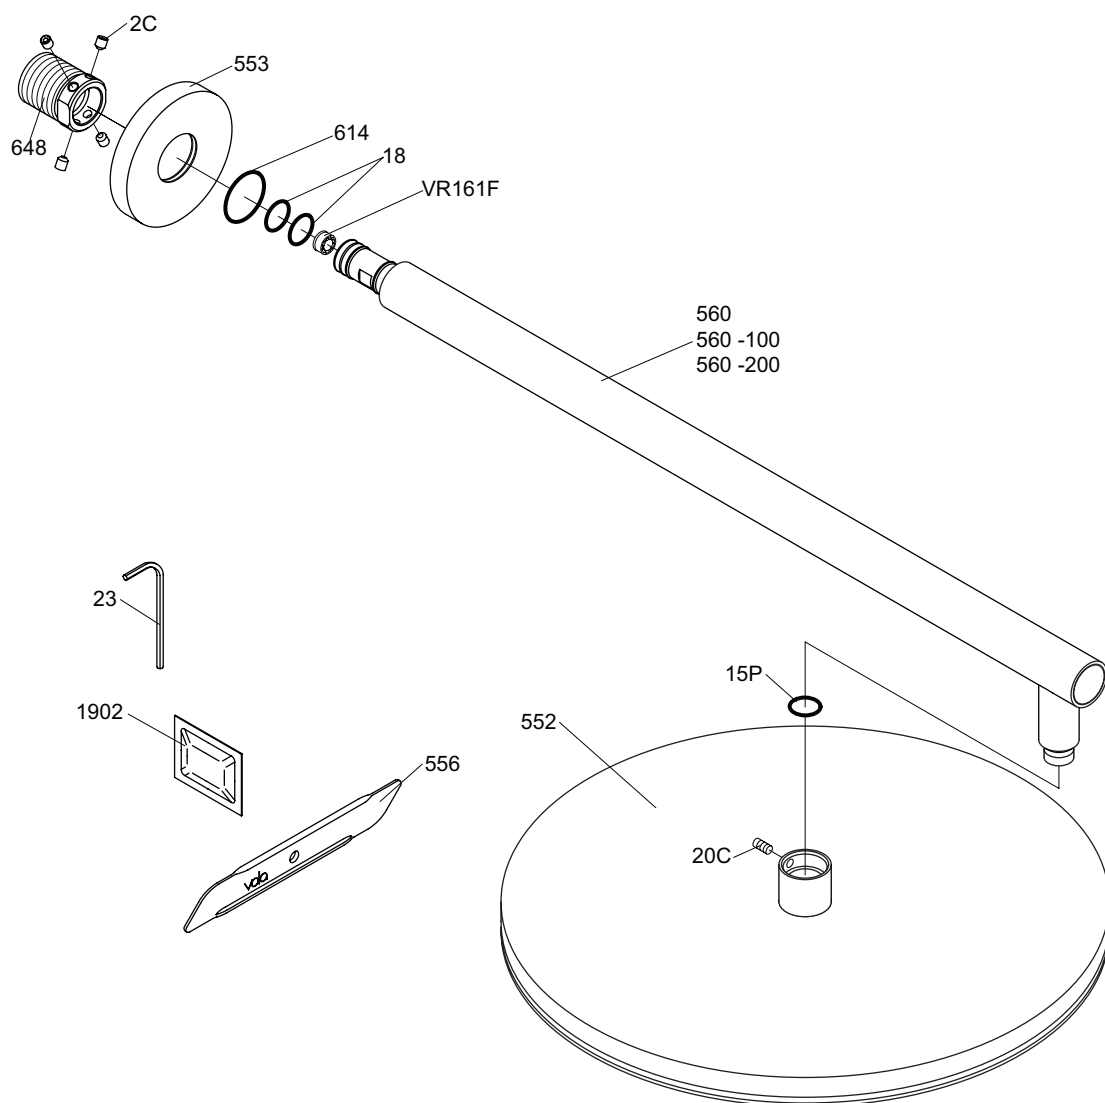

vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 060

Date
 mar. 14

Rev.
 1

Sheet
SB 15.1