

VOLA 100, 100X, 200, 200V, 300  
VOLA 400DV, 400, 400V, 400N, 400NV, 400T  
VOLA 400TV, 400F, 400FV, 400R, 400RV  
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400  
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV  
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction      Monteringsv gledning  
Montageanleitung      Montage hanleiding  
Monteringsvejledning      Manuel de montage

04/00029  
04/00031  
04/00055

www.vola.com

100-2100\_V3\_40998502  
09-01-2024

5 705230 286211

| vola.com                                                             | L                 | L1            | L2                | H               | H1               | D               |
|----------------------------------------------------------------------|-------------------|---------------|-------------------|-----------------|------------------|-----------------|
| 100, 100X, 200V, 300, 400V, 400DV<br>2100, 2100X, 2200V, 2300, 2400V | 377 mm<br>14 3/4" | 260 mm<br>10" | 268 mm<br>10 1/2" | 95 mm<br>3 3/4" | 186 mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 400NV, 400TV<br>2400NV, 2400TV                                       | 475 mm<br>18 3/4" | 355 mm<br>14" | 367 mm<br>14 1/2" |                 |                  |                 |
| 400FV, 400RV<br>2400FV, 2400RV                                       | 552 mm<br>21 3/4" | 435 mm<br>17" | 447 mm<br>17 5/8" |                 |                  |                 |



VR968: To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Best lls separat.  
Apart te bestellen.  
  commander s par ment.

| A                    | Data, 3 Bar/43.5 Psi: |        |          | Max. 65°C, 150°F |
|----------------------|-----------------------|--------|----------|------------------|
|                      |                       | l/min. | Gal/min. |                  |
|                      | 100:                  | 18,3   | 4.8      |                  |
|                      | 400V:                 | 15,6   | 4.1      |                  |
|                      | 2100:                 | 25,2   | 6.7      |                  |
| 2400V:               | 22,2                  | 5.9    |          |                  |
| Max.: 10 Bar/145 psi |                       |        |          |                  |

**B** Check the local legislation.  
Bitte die  rtlichen Vorschriften  berpr fen.  
Tjek de lokale regler.  
Kontrollera den lokala lagstiftning.  
Verifieer de lokale regelgeving.  
V rifiez la l gislation locale.

**!DO NOT!  
!REMOVE!**

**C** DE:  
Bitte separat beiliegende Anleitung f r die Schalld mpfer VR1249 beachten

DE:  
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

**D**

Box till inbygggnadsblandare.  
Boks til indbyggningsblander.  
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.  
Ikke inkludert, k pes separat.  
Eiv t sis lly tilaukseen, ostettava erikseen.

Extension  
Verl ngerung  
Forl ngerdele  
F rl ngning  
Aanpassing  
Modification

VR1260 VR2260

|     |     |     |
|-----|-----|-----|
| STD | +10 | +20 |
| +30 | +40 | +50 |

T Min. 3 mm  
Max 65 mm

Y Min. 48 mm  
Max. 110 mm

| T          | Y           | VR1260/2260/1400/2019 |
|------------|-------------|-----------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                  |
| 15 - 25 mm | 98 - 88 mm  | +10                   |
| 25 - 35 mm | 88 - 78 mm  | +20                   |
| 35 - 45 mm | 78 - 68 mm  | +30                   |
| 45 - 55 mm | 68 - 58 mm  | +40                   |
| 55 - 65 mm | 58 - 48 mm  | +50                   |

Fitting of extension  
Montage von verl ngerung  
Montering af forl ngerdele

Montering av f rl ngning  
Montage van de verlengstukken  
Montage des rallonges

VR1260+

VR2260+

VR2019+, VR2119+

VR1400+

400-2400



2

Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera den lokala lagstiftning.  
Verifieer de lokale regelgeving.  
Vérifiez la législation locale.


1. MAX. 16 Bar 232 Psi

2. MAX. 4 Bar 58 Psi

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**




100

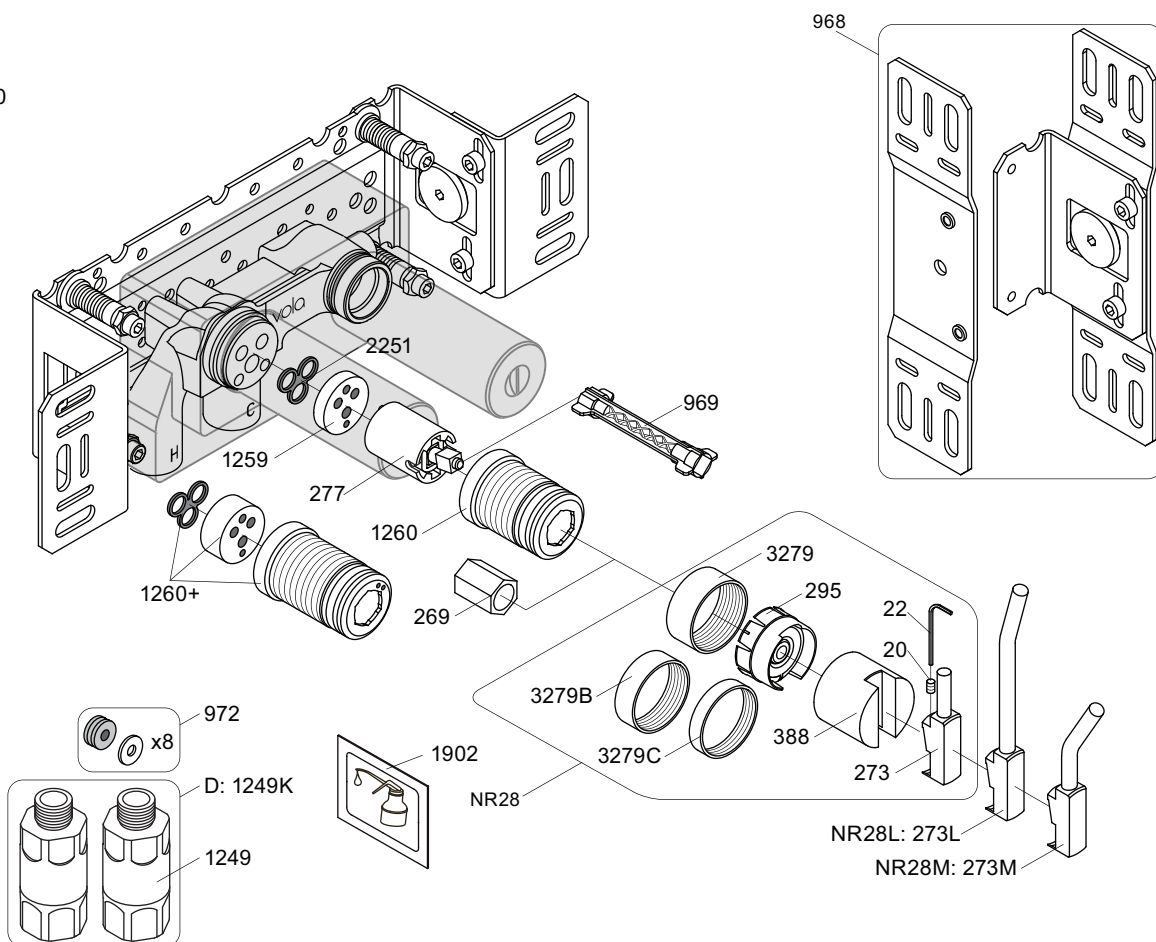


NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C  
 VR277K: VR22, VR269, VR277  
 VR1260: VR1259, VR1260, VR2251


100





100X




200V




300



3002




3003K



3003


-



3002



3001, 001




3001, 001



3001



3001, 001



**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 100**  
 100X, 200V, 300

Date  
 May. 22

Rev.  
 7

Sheet  
 SB 1.2