


Datum:

Kunde:

Projekt:

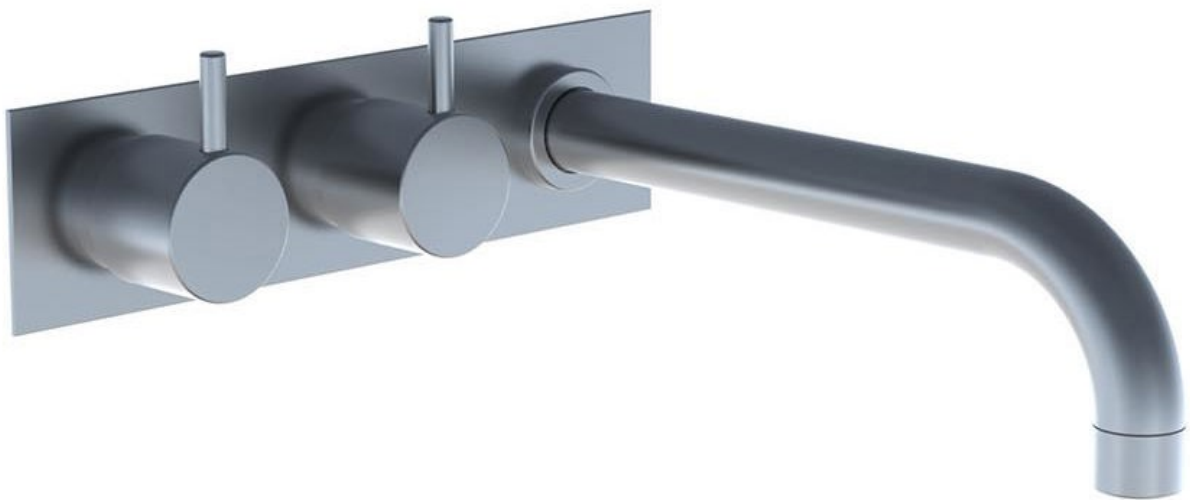

623CK


Waschtisch Zweigriffmischer, Wandmodell für Unterputzmontage, bestehend aus: 623CKUP = Unterputzmischer 600.

623CKAP = 2 Griffe NR17, festem Auslauf 020C, Ausladung 225 mm, Abdeckplatte 003K.

Durchfluss

	Bar:	1,0	2,0	3,0	4,0	5,0
623CK	(l/min)	17,3	24,5	30,0	30,0	30,0
623CK ¹⁾	(l/min)	28,9	40,8	50,0	57,7	64,5

¹⁾ 020C with VR624E

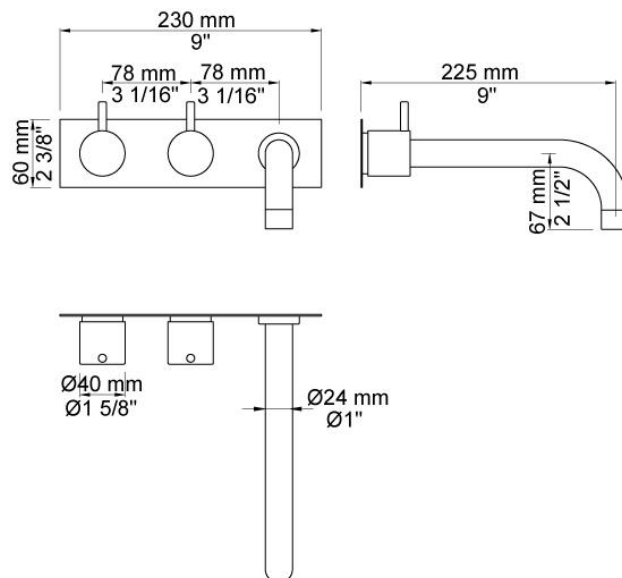**Lieferbar In Oberflächen**

Farbe 02, Hellgrau	Farbe 21, Karminrot
Farbe 04, Blau	Farbe 25, Pink
Farbe 05, Orange	Farbe 27, Schwarz matt
Farbe 06, Hellgrün	Farbe 28, Weiß matt
Farbe 08, Gelb	Farbe 40, Edelstahl gebürstet
Farbe 09, Dunkelgrau	Farbe 60, Schwarz
Farbe 12, Braun	Farbe 61, Schwarz gebürstet
Farbe 14, Hellrot	Farbe 62, Schwarz dunkel
Farbe 15, Dunkelblau	Farbe 63, Kupfer
Farbe 16, Chrom	Farbe 64, Kupfer gebürstet
Farbe 17, Schwarz glänzend	Farbe 65, Gold
Farbe 18, Weiß	Farbe 68, Silber
Farbe 19, Messing Natur	Farbe 70, Gold gebürstet
Farbe 20, Chrom matt	



Technical drawing of a three-hole plate. The overall width is 231 mm (9"). The overall height is 60 mm (2 3/8"). The distance between the centers of the holes is 78 mm (3 1/8"). The hole diameters are Ø33 mm (Ø1 3/8") for the left and middle holes, and Ø30 mm (Ø1 1/8") for the right hole.



Technical drawing of a 90-degree elbow. The drawing shows a side view of the elbow with the following dimensions:

- Outer diameter of the pipe: $\varnothing 24 \text{ mm}$ and $\varnothing 1''$.
- Length of the straight section: 225 mm and $9''$.
- Radius of the elbow: 67 mm and $2 \frac{1}{2}''$.
- Flange thickness: $3/4''$.

[illegible]

**NR17**

Griff NR17, Bedienungsgriff für Ventile und für alle Unterputz-Zweigriffmischer der Serien 600, 700, 800, 900, 1500, 2800, 2900, S20, S21, S40 und S42.

