

VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction Monteringsv gledning
Montageanleitung Montage hanleiding
Monteringsvejledning Manuel de montage

04/00029
04/00031
04/00055

www.vola.com

100-2100_V3_40998502
09-01-2024

5 705230 286211

vola.com	L	L1	L2	H	H1	D
100, 100X, 200V, 300, 400V, 400DV 2100, 2100X, 2200V, 2300, 2400V	377 mm 14 3/4"	260 mm 10"	268 mm 10 1/2"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
400NV, 400TV 2400NV, 2400TV	475 mm 18 3/4"	355 mm 14"	367 mm 14 1/2"			
400FV, 400RV 2400FV, 2400RV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			



VR968: To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Best lls separat.
Apart te bestellen.
  commander s par ment.

A	Data, 3 Bar/43.5 Psi:			Max. 65°C, 150°F
		l/min.	Gal/min.	
	100:	18,3	4.8	
	400V:	15,6	4.1	
	2100:	25,2	6.7	
2400V:	22,2	5.9		
Max.: 10 Bar/145 psi				

B

Check the local legislation.
Bitte die  rtlichen Vorschriften  berpr fen.
Tjek de lokale regler.
Kontrollera den lokala lagstiftning.
Verifieer de lokale regelgeving.
V rifiez la l gislation locale.

**!DO NOT!
!REMOVE!**

C

DE:
Bitte separat beiliegende Anleitung f r die Schalld mpfer VR1249 beachten

DE:
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

D

Box till inbygggnadsblandare.
Boks til indbyggningsblander.
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.
Ikke inkludert, k pes separat.
Eiv t sis lly tilaukseen, ostettava erikseen.

Extension
Verl ngerung
Forl ngerdele
F rl ngning
Aanpassing
Modification

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verl ngerung
Montering af forl ngerdele

Montering av f rl ngning
Montage van de verlengstukken
Montage des rallonges

Extension, retrofit
Verl ngerung, nachtr glicher Einbau
Forl ngerdele, eftermontering
F rl ngning, eftermontering
Aanpassing na montage
Modification apr s installation

	X	VR1260 + VR1400 + VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

	X	VR2260 + VR1400 + VR2019
	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

VR1260+

VR2260+

VR2019+, VR2119+

VR1400+

400-2400



2x13 mm Lightweight wall Leichtwand Let væg Lätta konstruktion Holle wandconstructie Construction légère



1x15 mm 1x18 mm 1x20 mm 2x13 mm Lightweight wall Leichtwand Let væg Lätta konstruktion Holle wandconstructie Construction légère



Masonry Mauerwerk Murværk Murwerk Massieve wand Mur Plein



2 Test Pressure Prüfdruck testtryk Test tryck Test druk test de pression Vérifiez la législation locale. ! Water - Wasser - Vand - Vatten - Water - L'eau ! MAX 1 Minute - Minut - Minuut !



VOLA 010, 020, 030, 040
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



04/00026
 04/00101
 04/00175
 04/00298

010, 020

010C, 020C

030

040

040D

www.vola.com

mnt_010_V1_40998360
 02-10-2023



5 705230 341750

Standard Flow data:		Max.
010/020	(l/min)	5.0
	(Gal/min)	1.3
010C/020C	(l/min)	30
	(Gal/min)	7.9
030	(l/min)	9.0
	(Gal/min)	2.0
040	(l/min)	25
	(Gal/min)	6.6
040D	(l/min)	30
	(Gal/min)	7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




For more water saving possibilities please see:
 Weitere Wassersparmöglichkeiten finden Sie auf:
 For flere vandbesparende muligheder se venligst:
 För mer vattenbesparande möjligheter hänvisas till:
 Voor meer waterbesparende mogelijkheden zie:
 Pour plus d'informations sur les options : économie d'eau, voir le site:


www.vola.com






010, 020

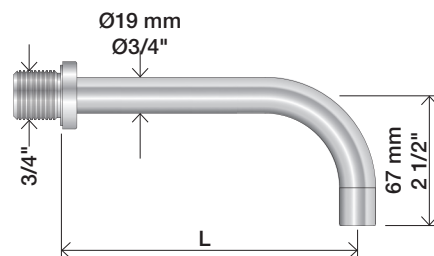


010C, 020C

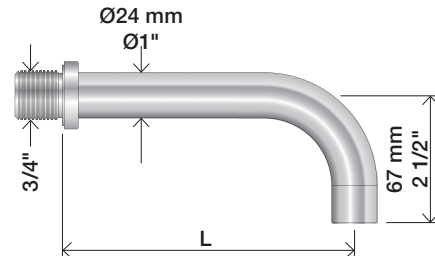



030

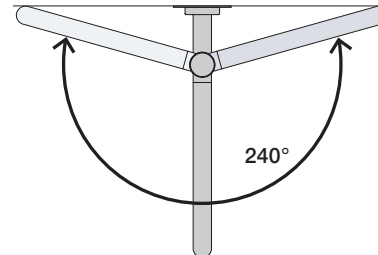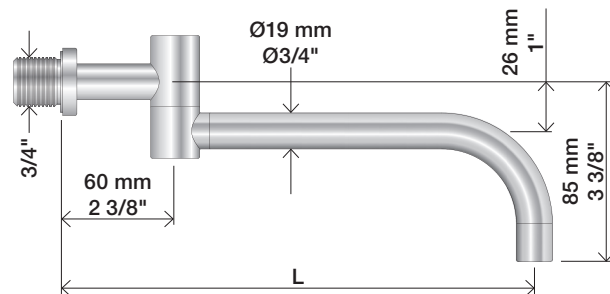

040

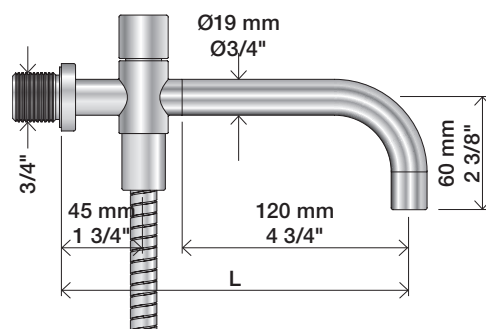

040D

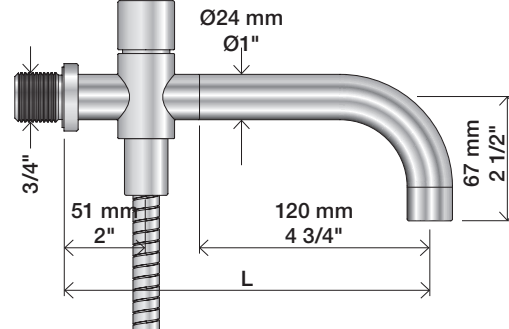


	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

	L (mm)	L (Inch)
040	185	7 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 010C, 020, 020C, 030, 040, 040D

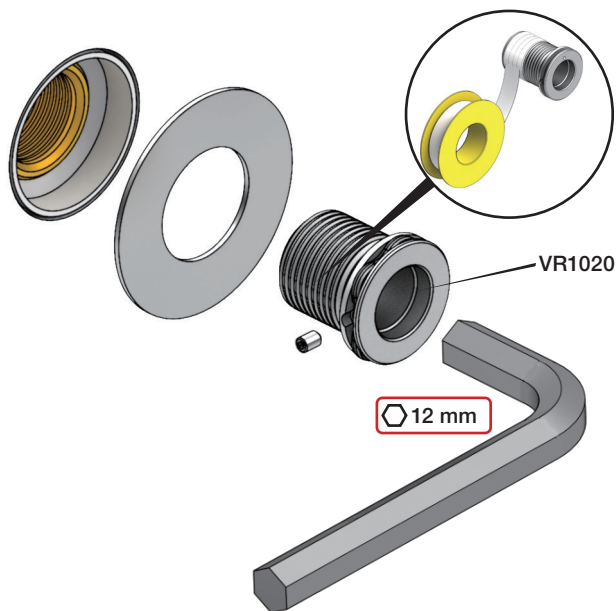


2



3

Ø19: 010, 020, 030, 040

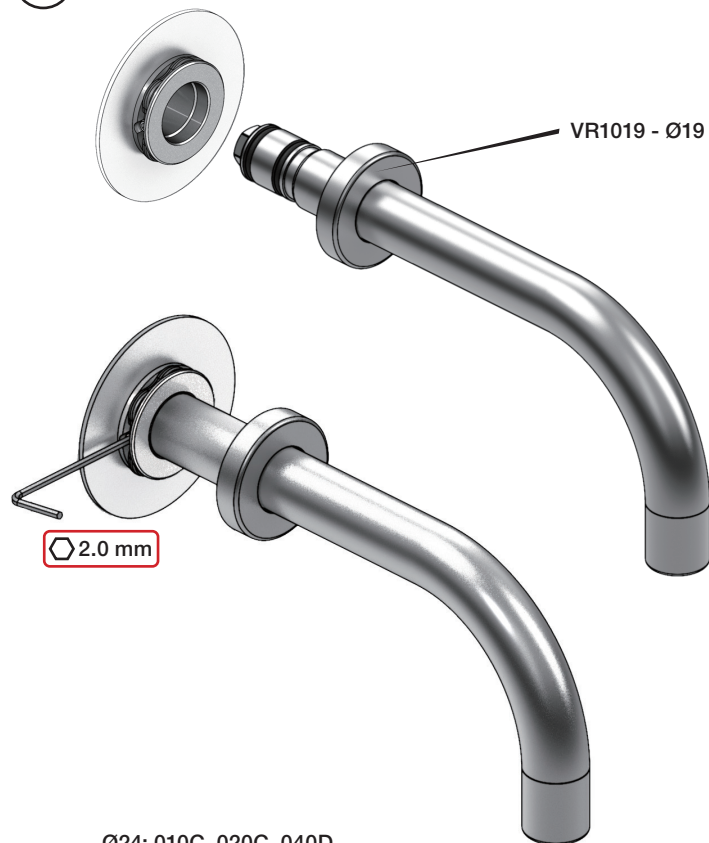


Ø24: 010C, 020C, 040D


Extension
VerlängerungForlængerdele
FörlängningVerlengstücken
ModificationT Min. 3 mm
Max. 65 mmY Min. 48 mm
Max. 110 mm

T	Y	VR2019 (Ø19) VR2119 (Ø24)
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+/VR2219+

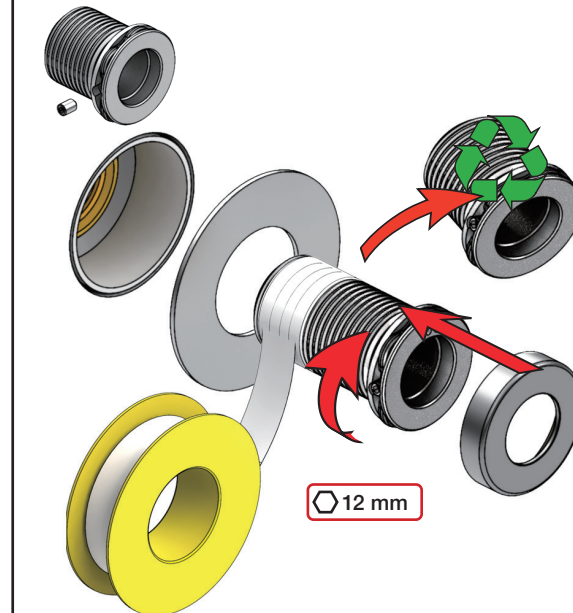

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvägledning
Montage hanleiding
Manuel de montage

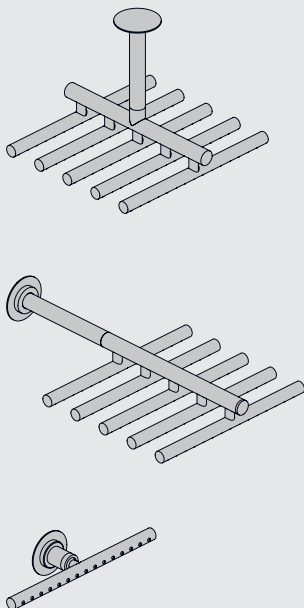


Data	Bar:	1	2	3	4	5
051	(l/min)	13	19	23	26	30
051A	(Gal/min)	3.5	5.0	6.1	7.0	7.8
051K	(l/min)	5	5	5	5	5
	(Gal/min)	1.3	1.3	1.3	1.3	1.3
	Max. 65°C. 150°F					



VR161B: 6 l/min - 1.6 Gal/min
VR161K: 7 l/min - 1.8 Gal/min
VR161D: 9 l/min - 2.5 Gal/min
VR161F: 14 l/min - 3.7 Gal/min

 VR161D



VR161F







USA:
Max. flow rate:
1.6 Gal/min.
6.0 l/min.


Technical drawings of the 100 Series Standard and 100 Series Plus. The left drawing shows a 100 Series Standard with a 250 mm (10 inch) width. The right drawing shows a 100 Series Plus with a 50 mm (2 inch) height and various length options: -100 (205 mm / 8 inch), Std. (310 mm / 12 inch), +100 (405 mm / 16 inch), Std. (505 mm / 20 inch), and a total length of 215 mm (8 1/2 inch).

Technical drawings of two test specimens, labeled 'a' and 'b'. Both specimens have a base plate with a width of 250 mm (10 inches) and a height of 190 mm (7 1/2 inches). Specimen 'a' has a vertical rod with a diameter of 10 mm (3/8 inch) and a height of 290 mm (11 3/8 inches). Specimen 'b' has a vertical rod with a diameter of 10 mm (3/8 inch) and a height of 290 mm (11 3/8 inches). The top of specimen 'b' has a 3/4 inch wide flange.

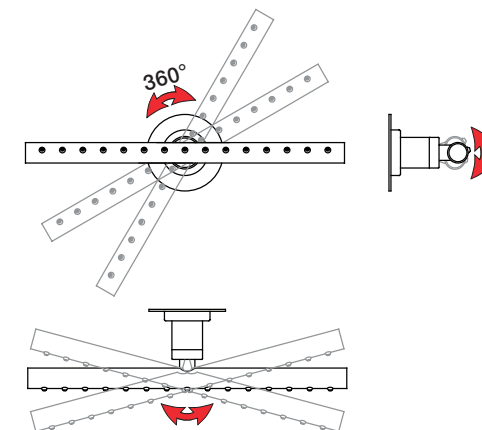
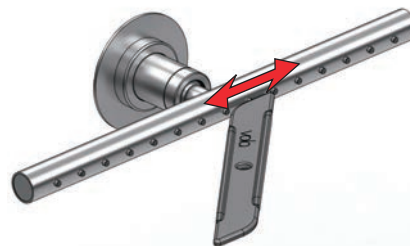
[illegible]

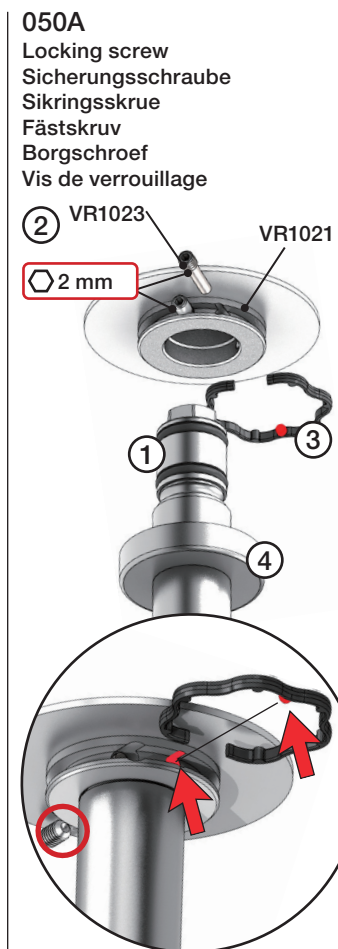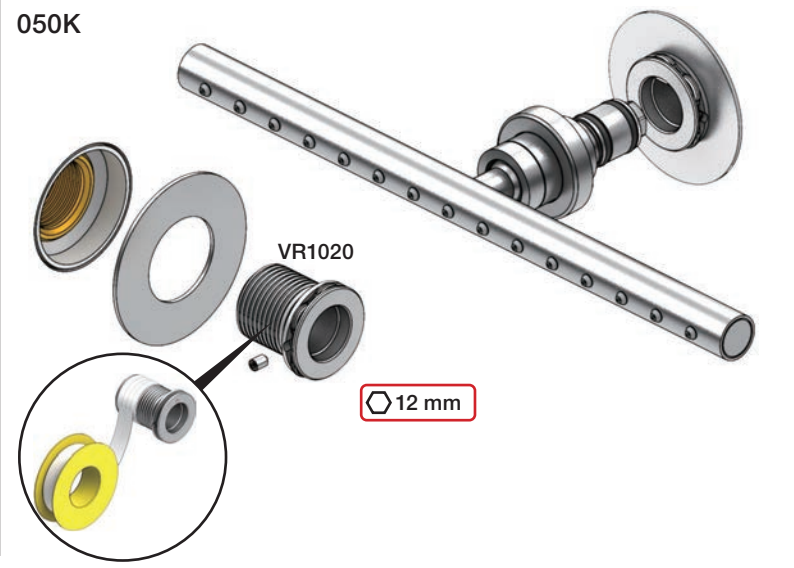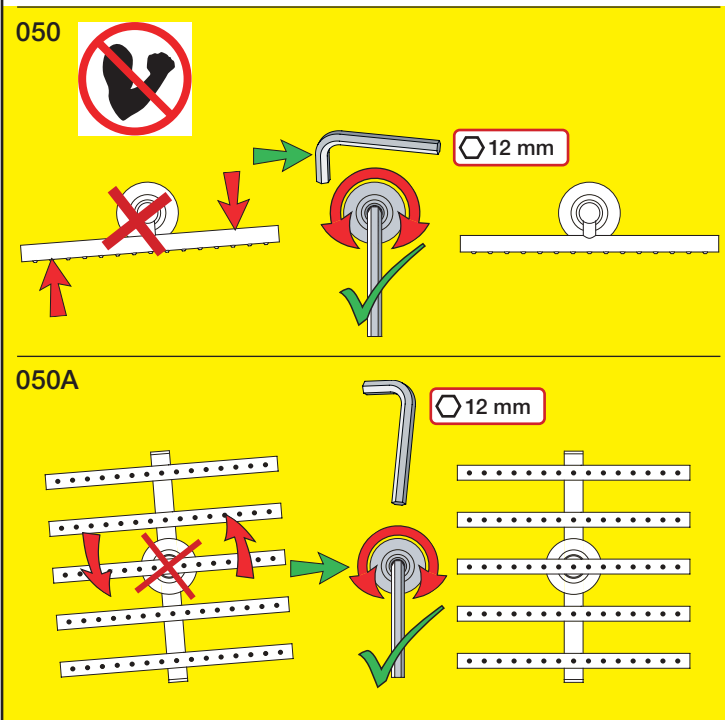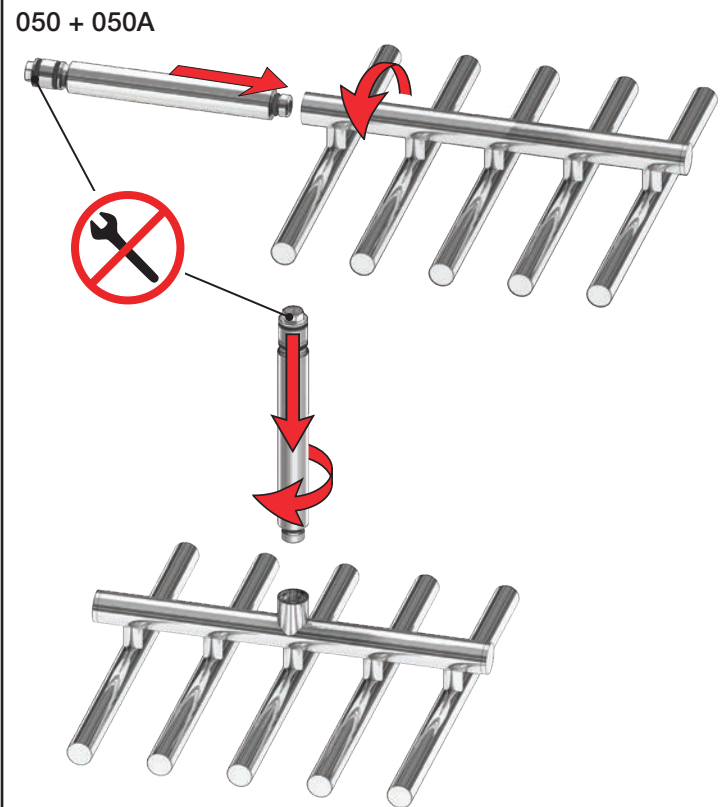

Extension Verlängerung	Forlængerdele Förlängning	Verlengstucken Modification
T Min. 3 mm Max. 65 mm	Y Min. 48 mm Max. 110 mm	
T	Y	VR2119 (VR1020): 050K VR2021 (VR1020): 050 VR2219 (VR1021): 050A
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

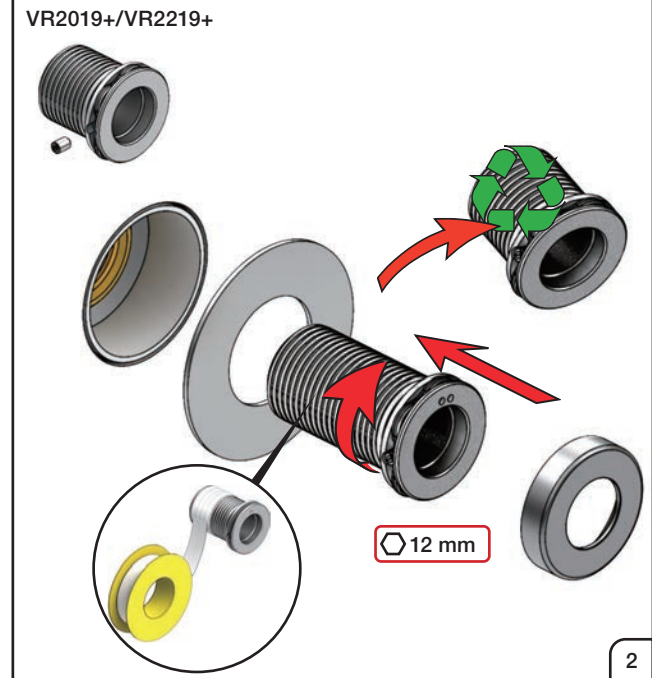

Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

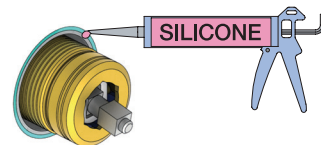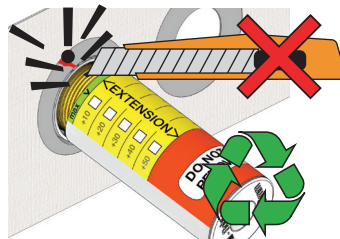

*Membran används inte i SVERIGE,
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:

2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50



VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50


NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"

NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1


VR3279

VR3279B

NR 28 - 2

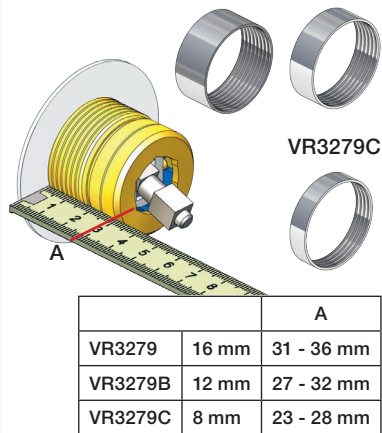

	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

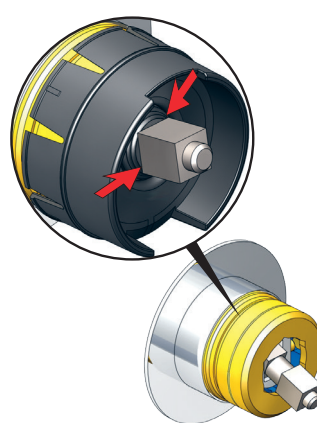


NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

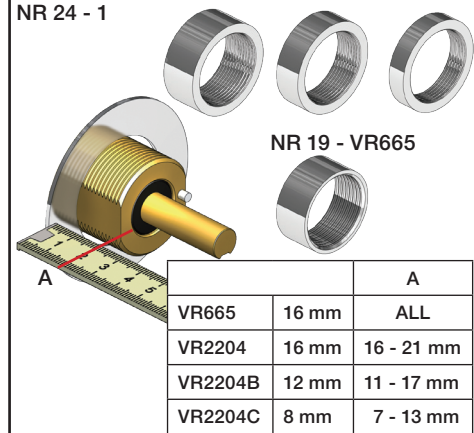


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

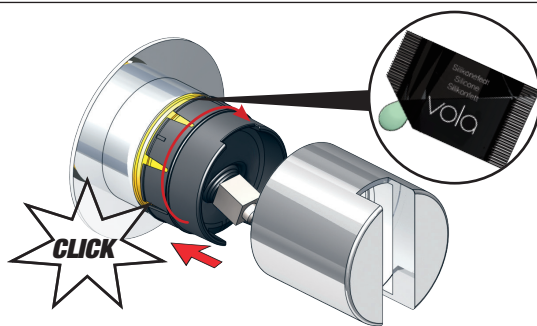


NR 28 - 4




NR 19 - 2 NR 24 - 2

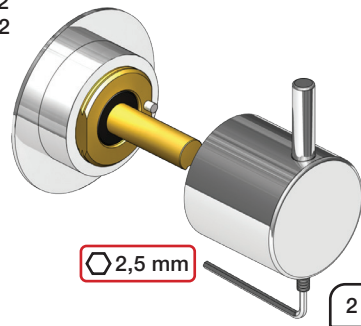


T4




T5




T6

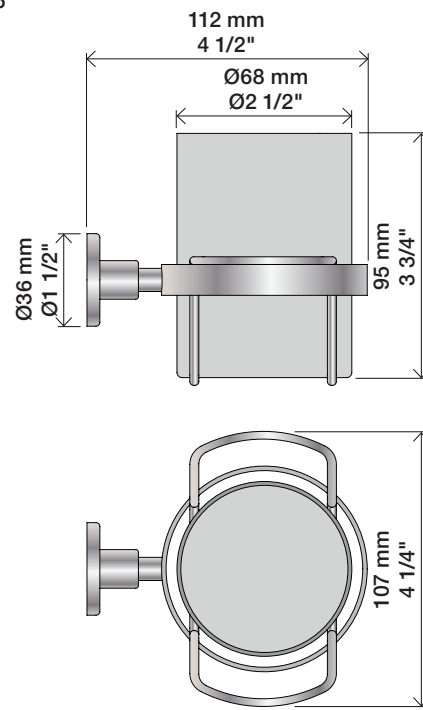


T7

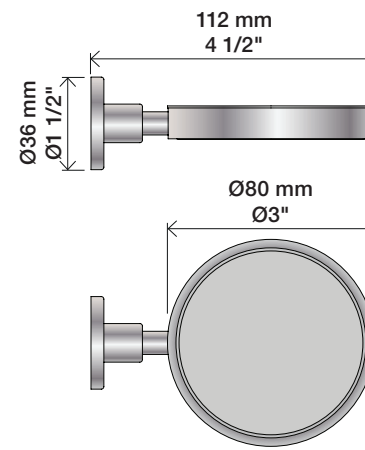


T11




T16

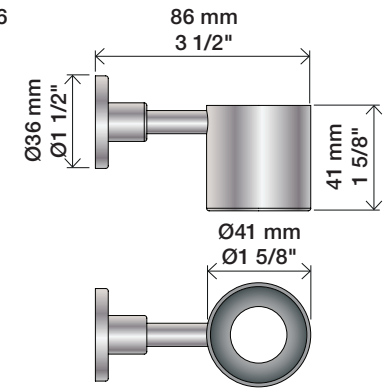


T14

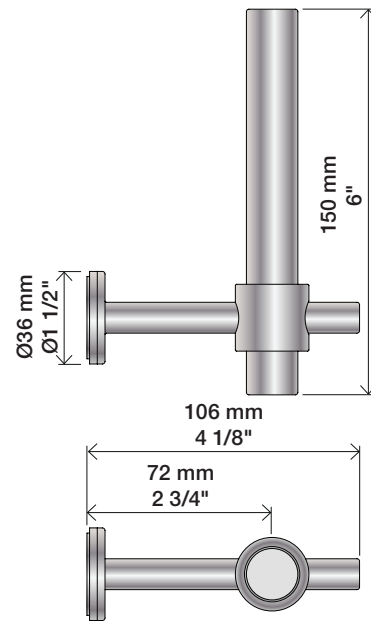


T8





T9




T3



T27

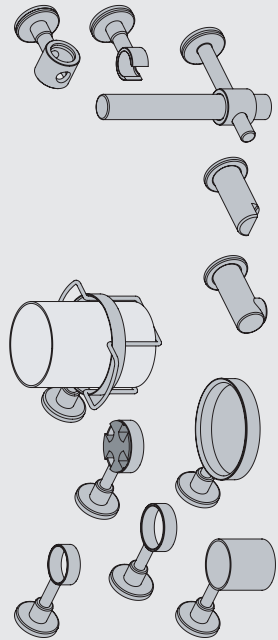

5 1703182 372310

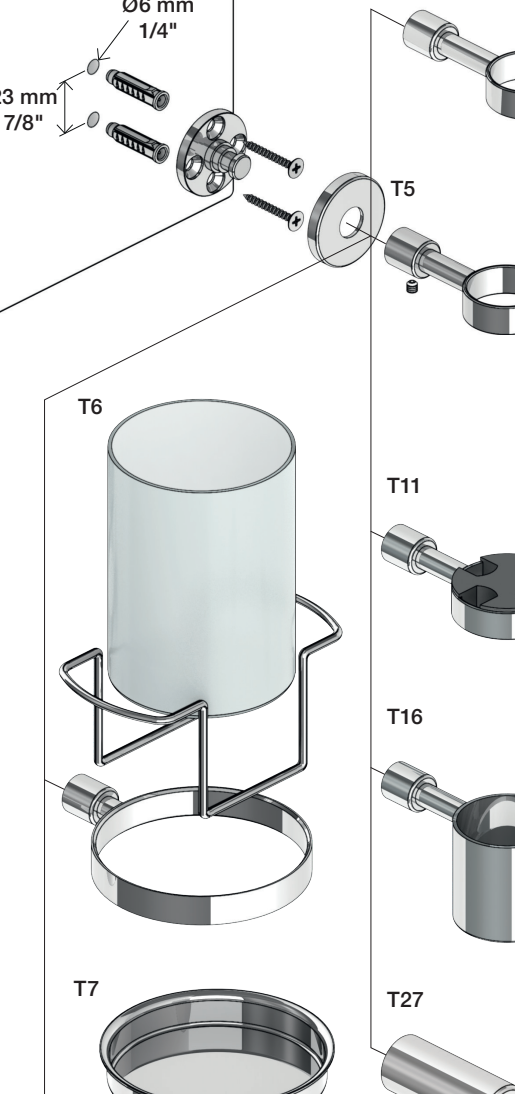


Exploded view diagram of the T4000 Series 24" unit, showing the main components and their assembly sequence:

- Top Panel:** A large rectangular panel with a 2 mm hex key (2 mm) used for assembly.
- Mounting Hardware:**
 - T4:** A mounting bracket with a circular flange.
 - T5:** A mounting bracket with a circular flange.
 - T6:** A mounting bracket with a circular flange.
 - T7:** A mounting bracket with a circular flange.
 - T11:** A mounting bracket with a circular flange.
 - T16:** A mounting bracket with a circular flange.
 - T27:** A mounting bracket with a circular flange.
- Internal Components:**
 - Ø6 mm 1/4":** A small circular component.
 - 23 mm 7/8":** A small circular component.
 - 24" x 24" x 1/2" (610 mm x 610 mm x 12 mm):** The main unit body.
 - 24" x 24" x 1/2" (610 mm x 610 mm x 12 mm):** The main unit body.
 - 24" x 24" x 1/2" (610 mm x 610 mm x 12 mm):** The main unit body.

Exploded view diagram of the door handle assembly. The diagram shows the following components and their assembly sequence:

- Base Plate:** A rectangular plate with a circular mounting area.
- Mounting Screws:** Two screws are shown being inserted into the base plate.
- Spacer Screws:** Two screws, labeled $\varnothing 6 \text{ mm}$ and $1/4''$, are shown being inserted into the base plate.
- Dimension:** A dimension of 25 mm ($1''$) is indicated for the distance between the mounting screws.
- Component T8:** A cylindrical handle with a curved grip, shown being inserted into the base plate.
- Component T9:** A cylindrical handle with a curved grip, shown being inserted into the base plate.
- Component T14:** A cylindrical handle with a curved grip, shown being inserted into the base plate.

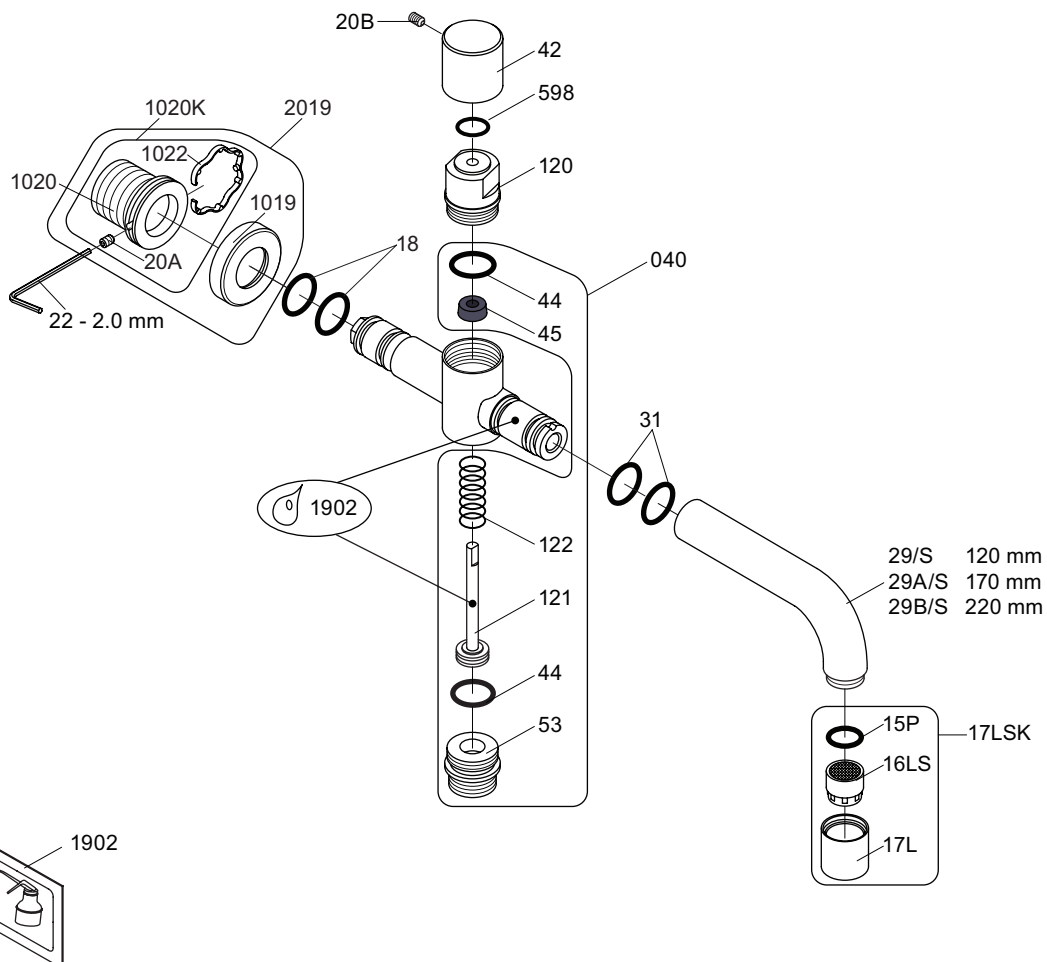

VR040: VR22, 2xVR44, VR45, VR53, VR121, VR122, VR1902
 VR17LSK: VR15P, VR16LS, VR17L
 VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 040
185/235/285

Date
 Apr. 21

Rev.
 5





Sheet
 SB 13

2400V


Diagram illustrating the exploded view of the 2400V component assembly, showing various parts and their assembly sequence:

- 1400V
- 406
- 2213+
- 1400+
- 403
- 21
- 2205+
- 2204C
- 2204B
- 2204
- 2424
- NR24*
- NR24**
- 2A
- 23
- 968
- NR21L: 2273L
- NR21M: 2273M
- 1410
- 1411
- 1249
- D: 1249K
- 972
- x8
- 1902
- 2260+
- 1277
- 2251
- 2260
- 2269
- 969
- 2279
- 1275
- 22
- 20D
- 2273
- 2278
- 2279B
- 2279C
- NR21
- 2205
- 403
- 21
- 2213
- 406


NR21:	VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
NR24*:	VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
NR24**:	VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
VR1277K:	VR22, VR2269, VR1277
VR1400:	VR21, VR23, VR406, VR1902, VR2213

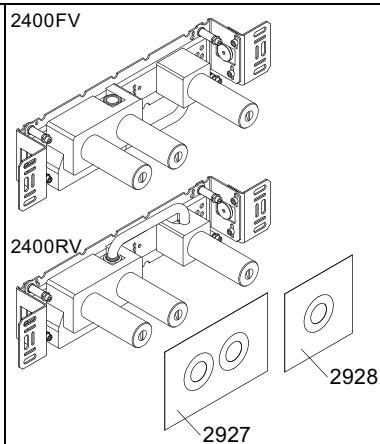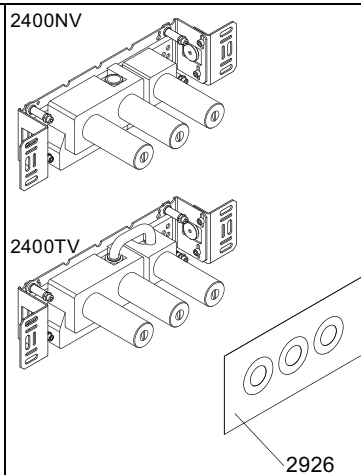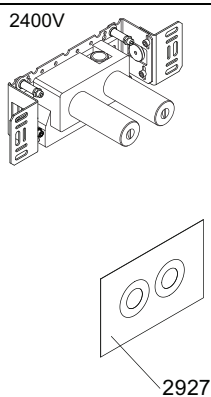


1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001



voia®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com



VOLA 2400

2400V/FV/NV/RV/TV

Date
May. 22

Rev. 5

Sheet
SB 10.10

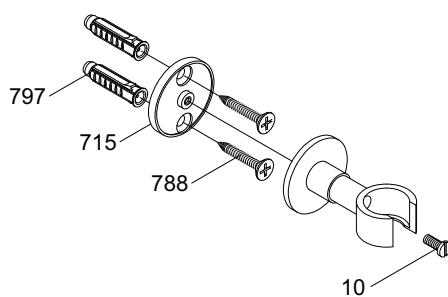

VOLA A/S
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA T8

Dato

Jan. 96

Rev.

1

Blad

SB 40.6