

VOLA 010, 020, 030, 040
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



04/00026
 04/00101
 04/00175
 04/00298

010, 020

010C, 020C

030

040

040D

www.vola.com

mnt_010_V1_40998360
 02-10-2023



5 705230 341750

Standard Flow data:		Max.
010/020	(l/min)	5.0
	(Gal/min)	1.3
010C/020C	(l/min)	30
	(Gal/min)	7.9
030	(l/min)	9.0
	(Gal/min)	2.0
040	(l/min)	25
	(Gal/min)	6.6
040D	(l/min)	30
	(Gal/min)	7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min



VR161K



VR161D



VR161F




For more water saving possibilities please see:
 Weitere Wassersparmöglichkeiten finden Sie auf:
 For flere vandbesparende muligheder se venligst:
 För mer vattenbesparande möjligheter hänvisas till:
 Voor meer waterbesparende mogelijkheden zie:
 Pour plus d'informations sur les options : économie d'eau, voir le site:


www.vola.com





010, 020

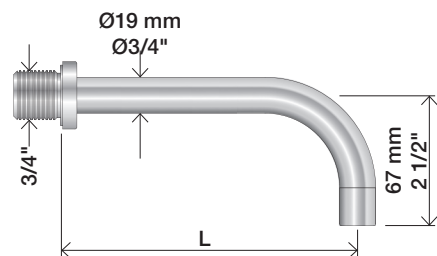


010C, 020C

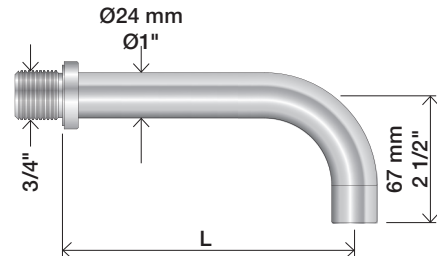



030

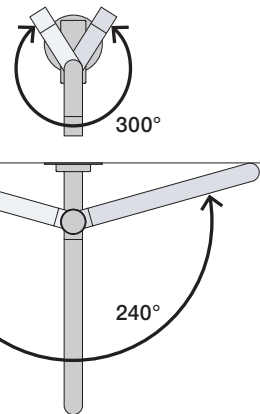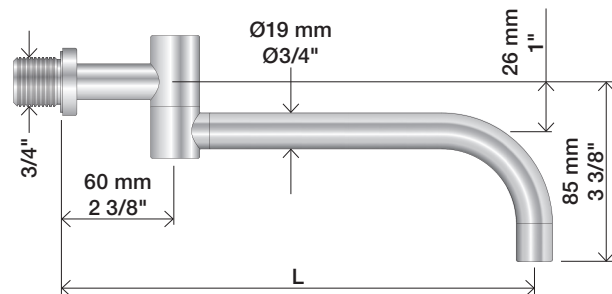

040

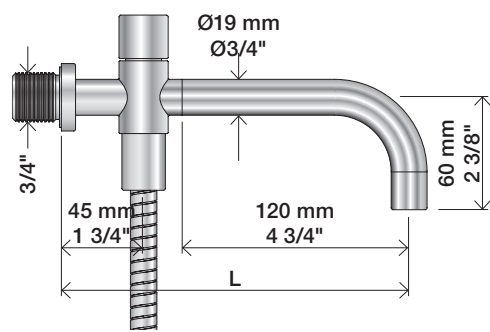

040D

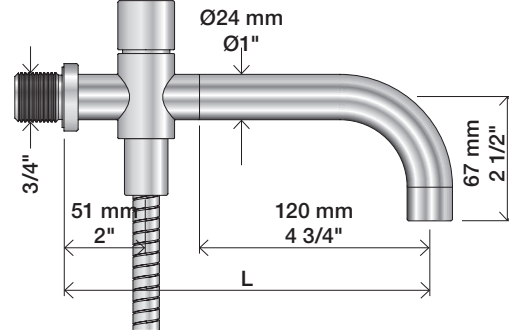


	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

	L (mm)	L (Inch)
040	185	7 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 010C, 020, 020C, 030, 040, 040D

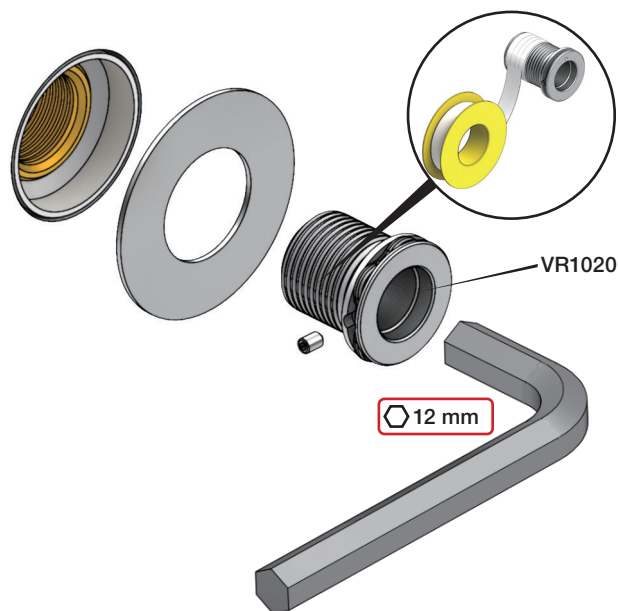


2






3

Ø19: 010, 020, 030, 040

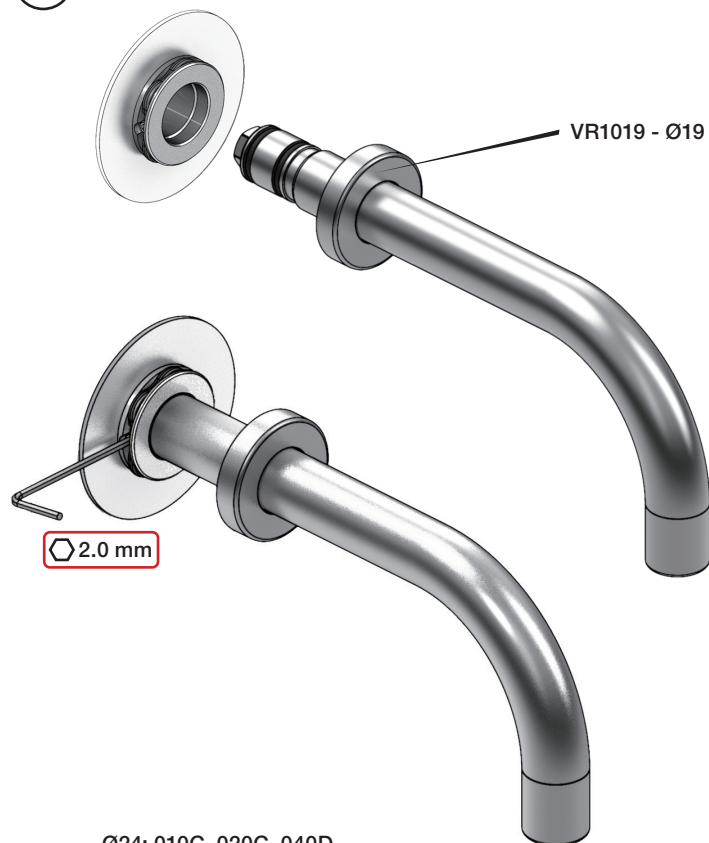


Ø24: 010C, 020C, 040D

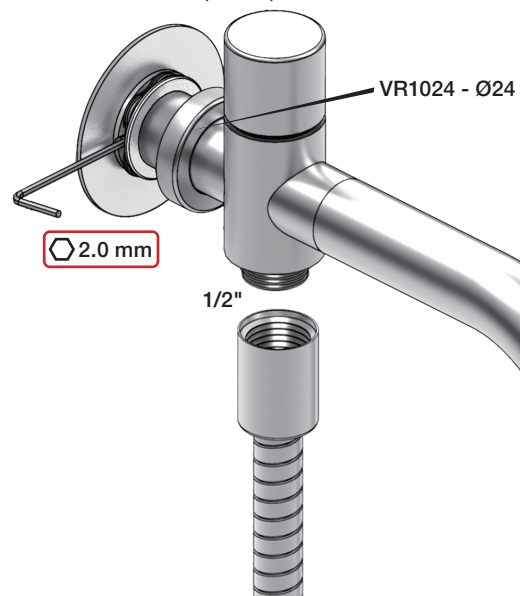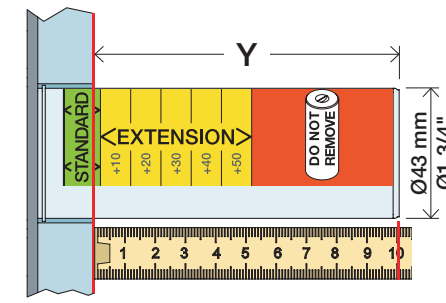

Extension
VerlängerungForlængerdele
FörlängningVerlengstücken
ModificationT Min. 3 mm
Max. 65 mmY Min. 48 mm
Max. 110 mm

T	Y	VR2019 (Ø19) VR2119 (Ø24)
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50


VR2019+/VR2219+

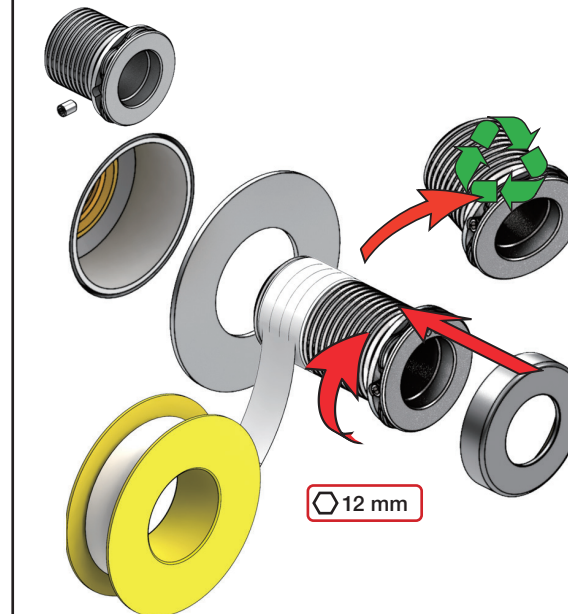

Monteringsvägledning
Montage hanleiding
Manuel de montage




mnt_4900_V3_40998511
27-11-2023

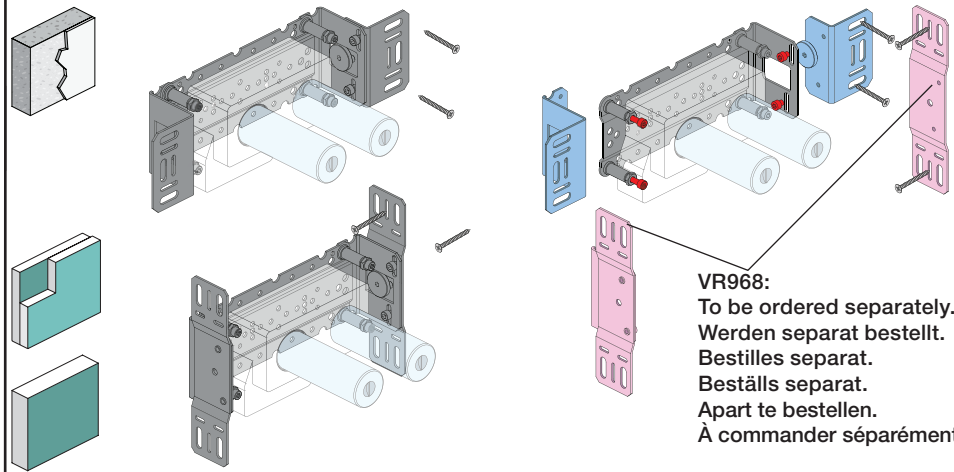

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.


A	Data, 3 Bar/43.5 Psi:		 Max. 65°C, 150°F
	l/min.	Gal/min.	
4300:	30.0	7.9	Max.: 10 Bar/145 psi
4800:	30.0	7.9	
4900:	18.3	4.8	

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.



  DE:
Bitte separat beiliegende Anleitung für die Schalldämpfer
VR1249 beachten

DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten



D Cabling Kabelføring Bekabeling  **2**
 Verkabelung Kabeldragning Câblage

 = Ø10 - 1/2"

The diagram illustrates the connection of two different types of cables to their respective connectors. The top part shows a yellow cable being inserted into a circular connector with three pins. The bottom part shows a black cable being inserted into a rectangular connector with two pins.

4300/4800:

Alt.: 

Premixed water
Vorgemischte Wasser
Förblandet vand
Förblandade vatten
Voorgemengd water
D'eau prémélangée


4900:

1/2"
US 1/2" NPT



L = 130 cm
L = 51"

110-230VAC

Ø10 mm



Y Min. 48 mm
Max. 110 mm

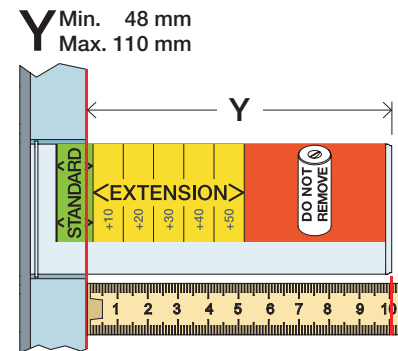

	T	Y	VR1260/VR2019	VR513A
	3 - 15 mm	110 - 98 mm	Std.	Std.
	15 - 25 mm	98 - 88 mm	+10	x1
	25 - 35 mm	88 - 78 mm	+20	
	35 - 45 mm	78 - 68 mm	+30	x2
	45 - 55 mm	68 - 58 mm	+40	
	55 - 65 mm	58 - 48 mm	+50	

Fitting of extension
Montage von verlängerung




Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges


VR1260+

VR2019+

VR513A

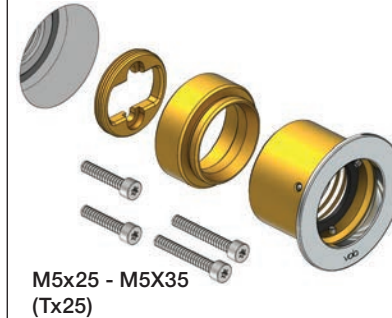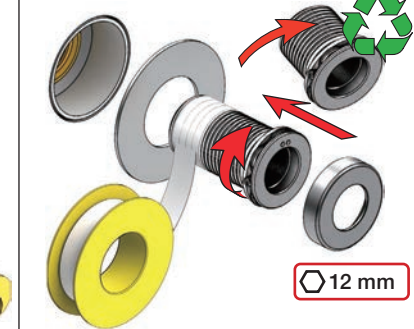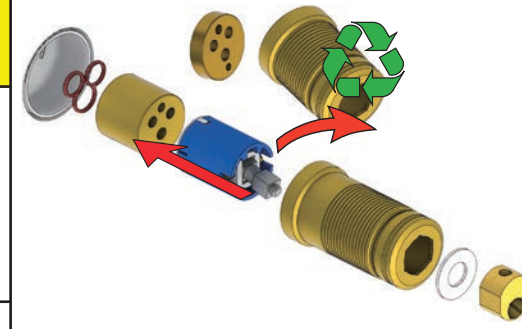


VR513A

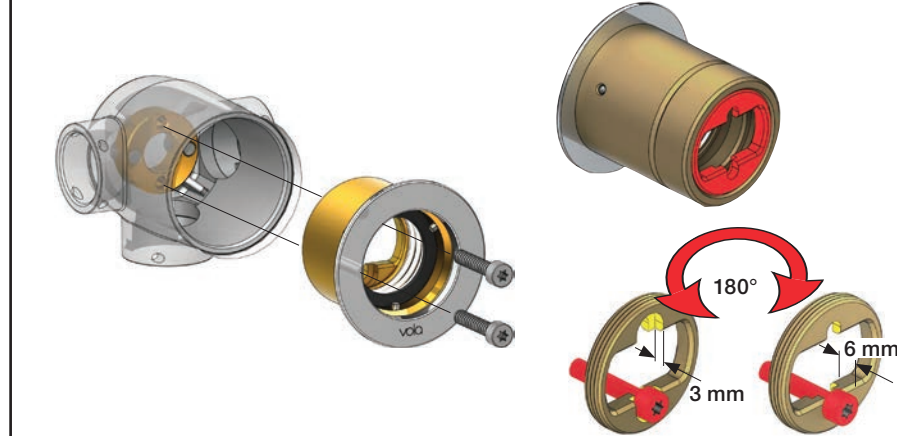


A: 10 - 20 mm = M5x25














A: 20 - 29 mm = M5x35



Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

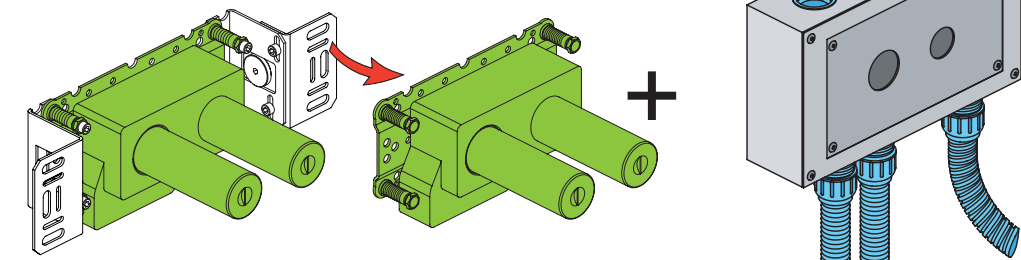

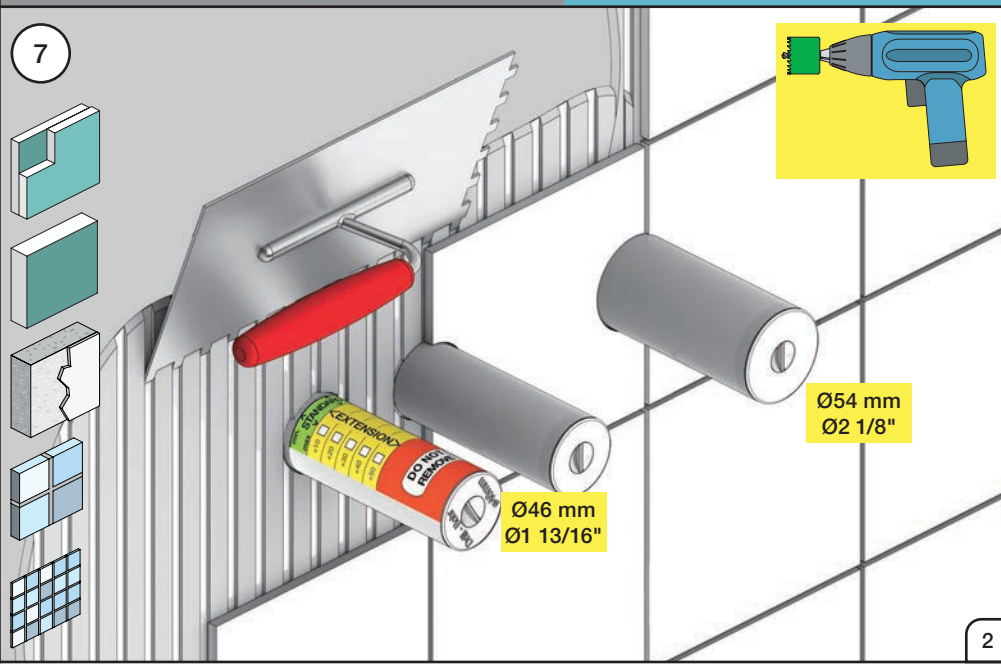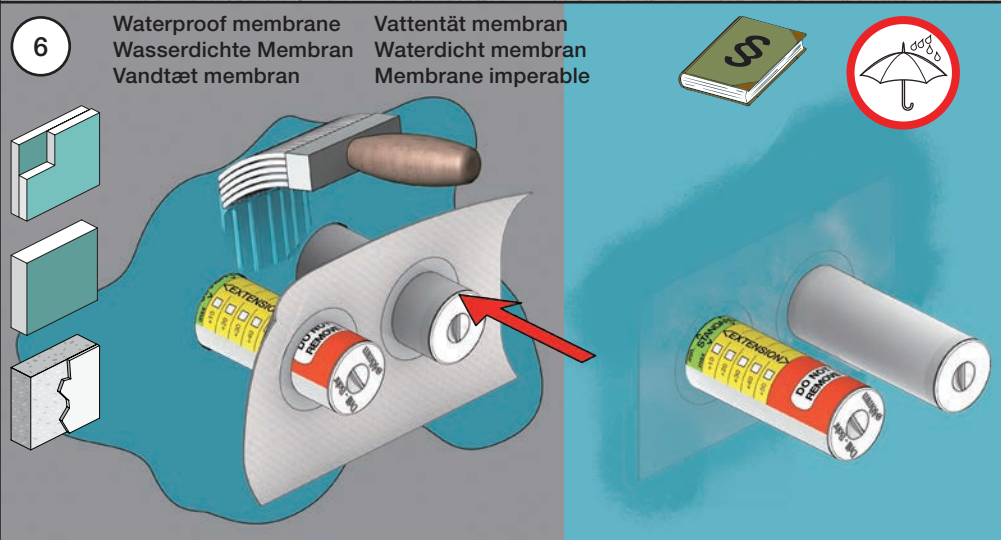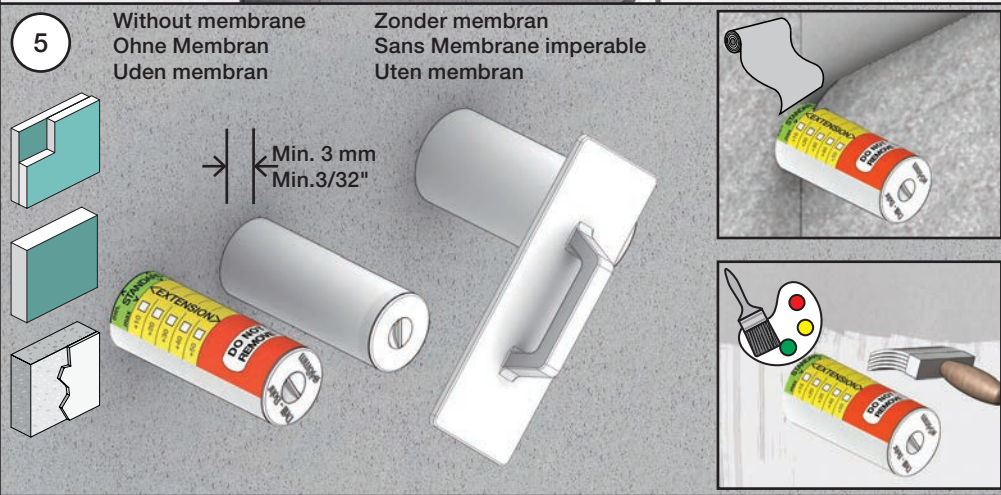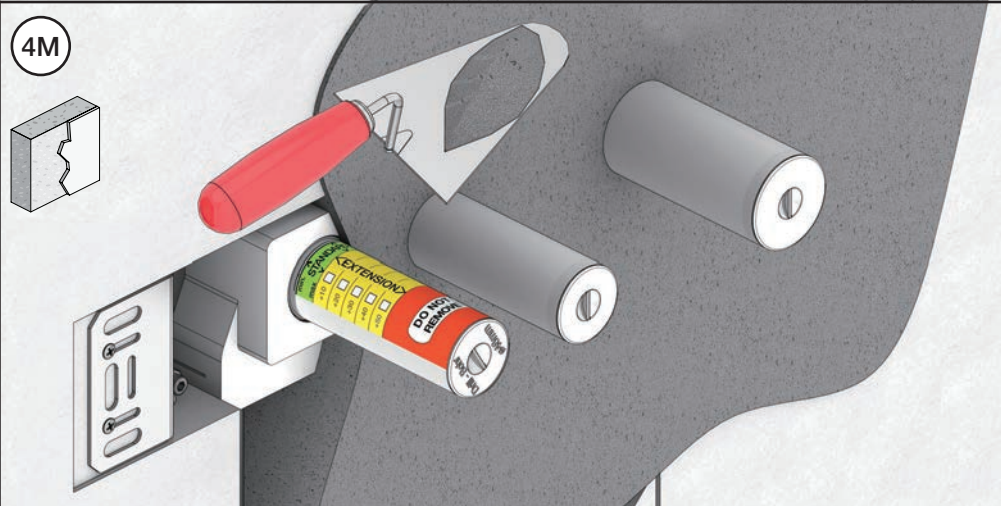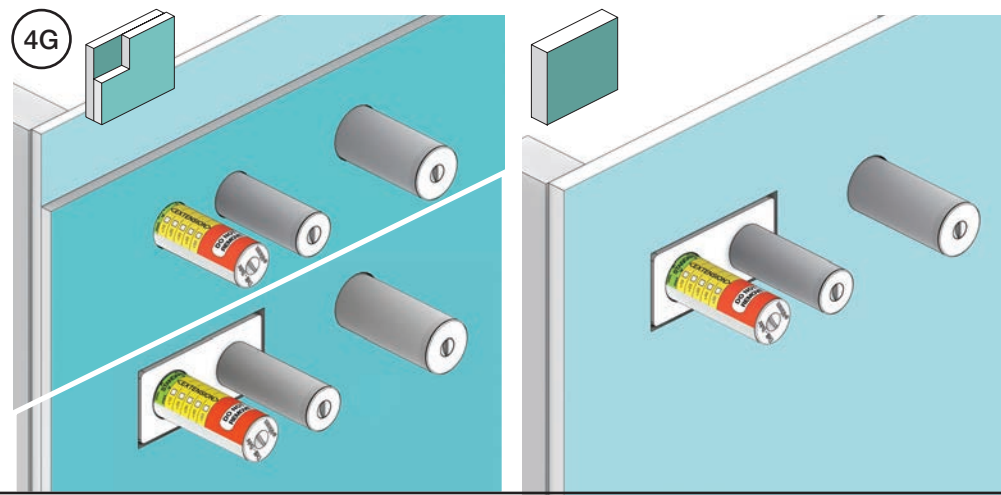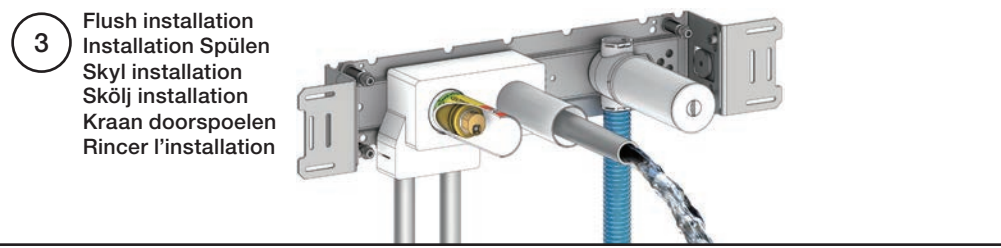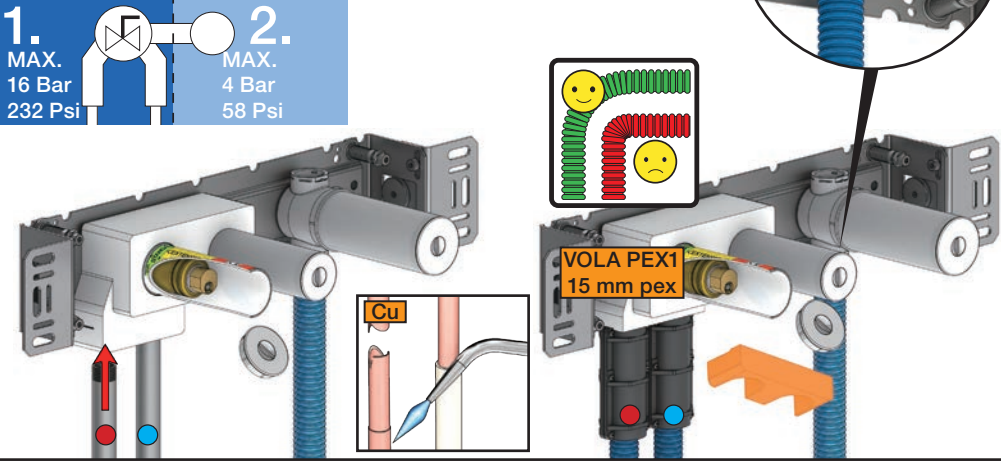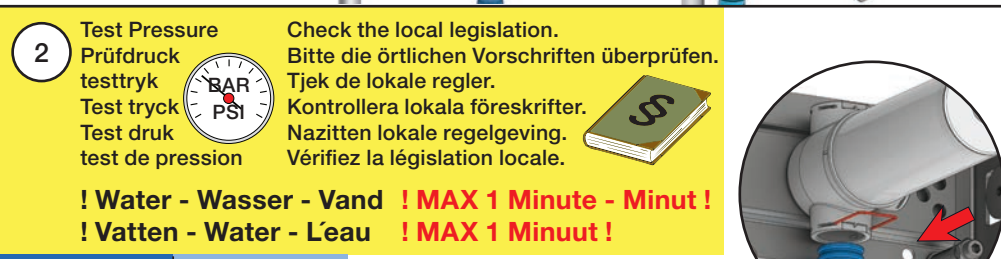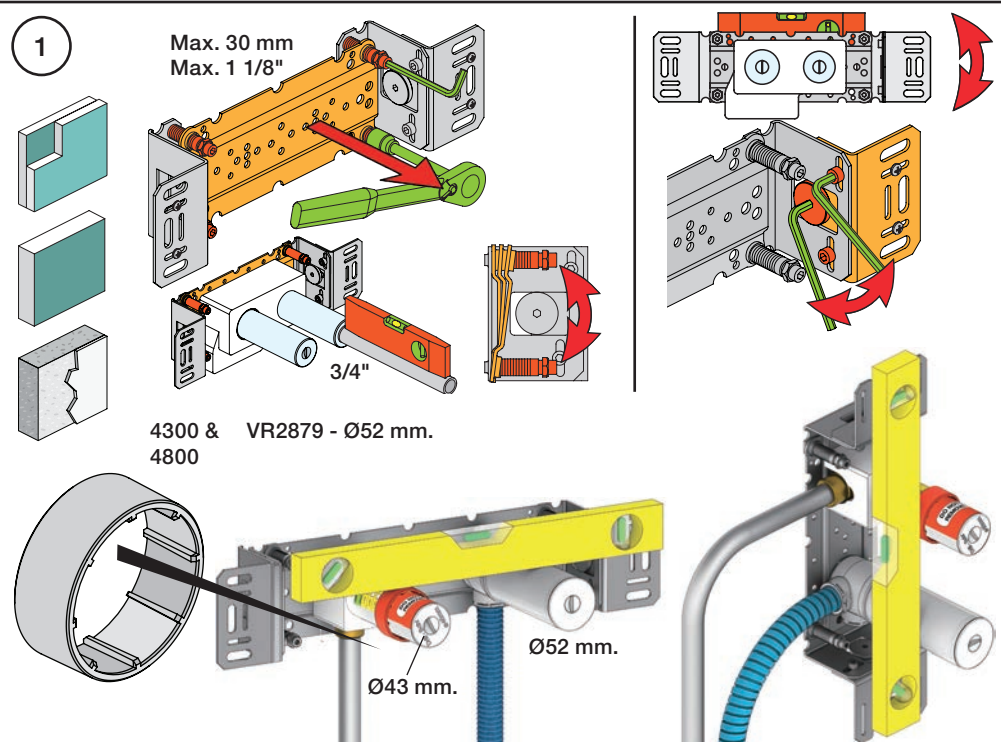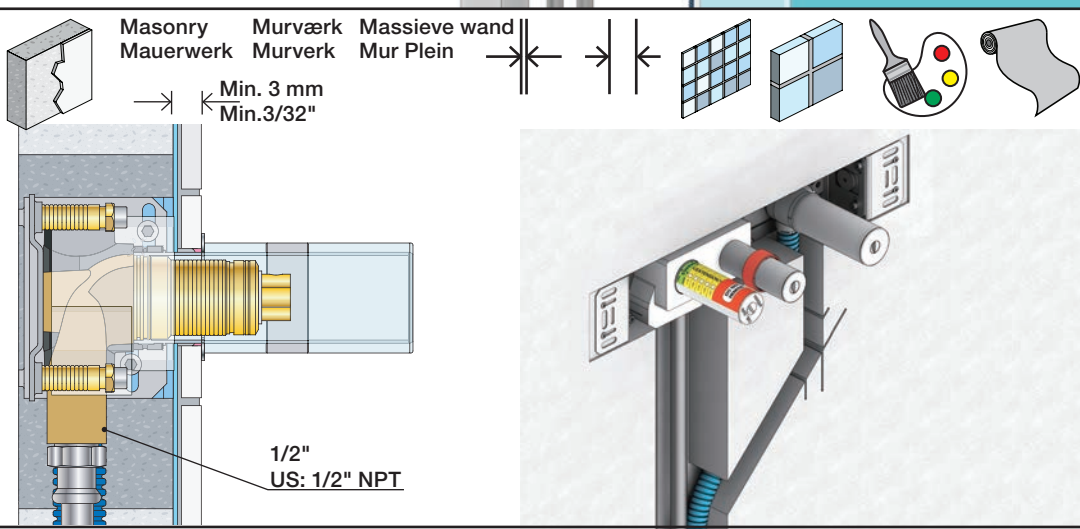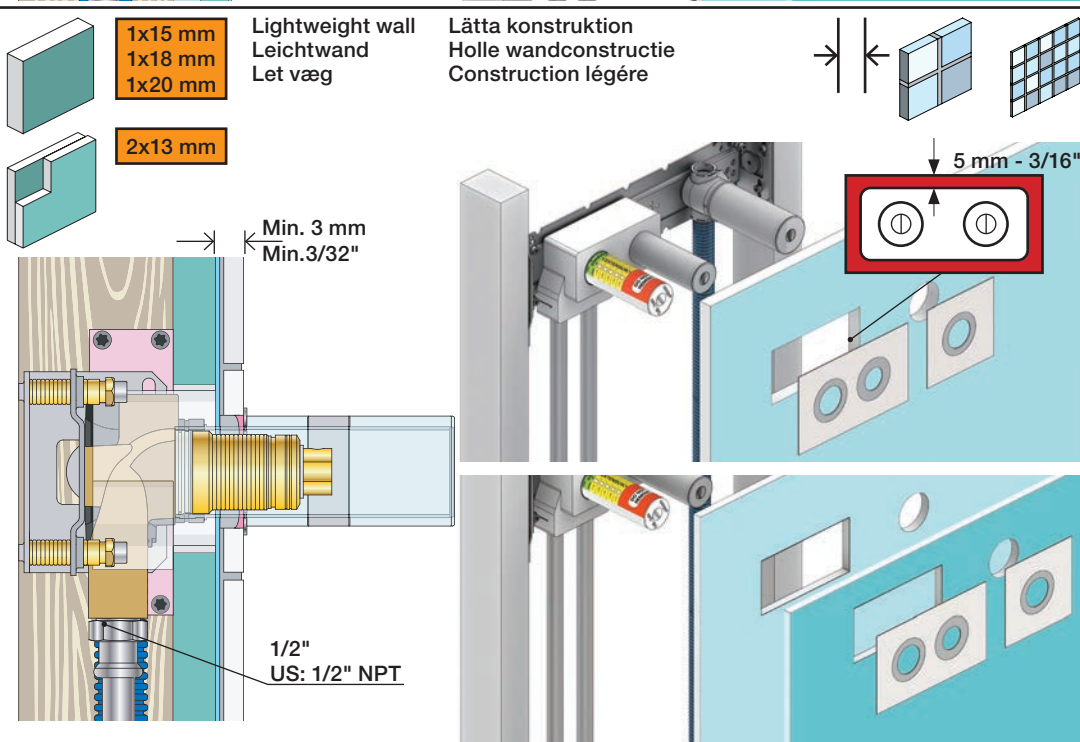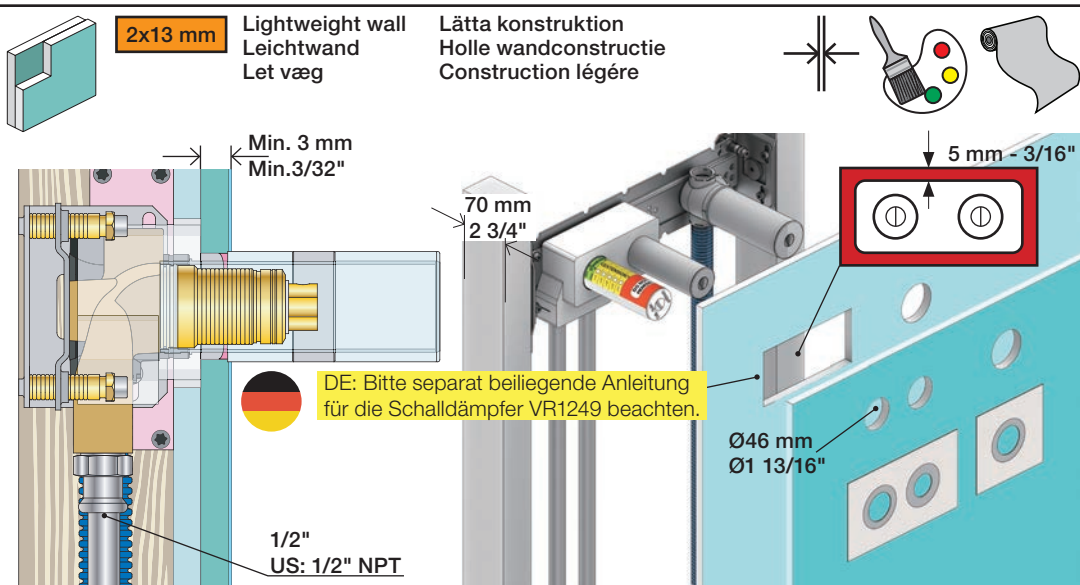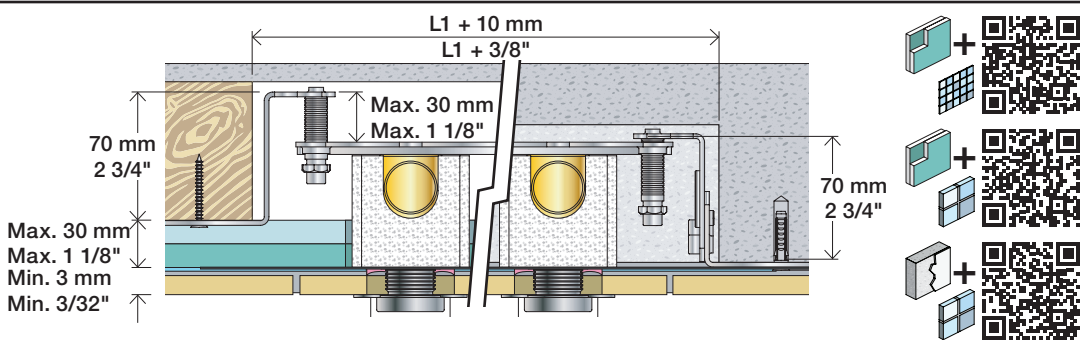

VOLA NR.41
VOLA VR512
VOLA 4002/L/V, 4003



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.41:

1

VR512:
4002/L/V:
4003:

2

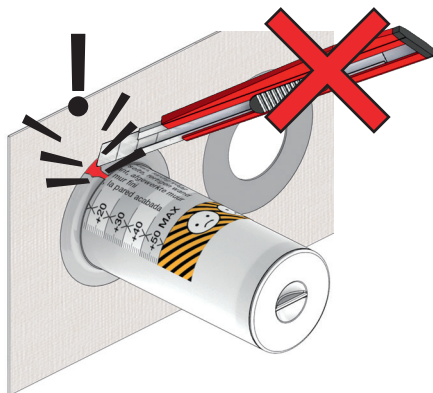

www.vola.com


vola

mnt_NR41_40998512_V1




©VOLA A/S 5 705230 296593

NR 41




NR 41 - 1

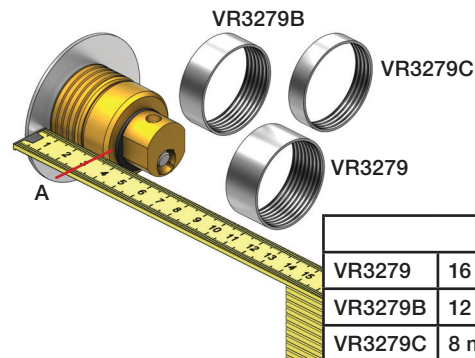




		A
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 41 - 2






VR512
4002L



4002V
4003

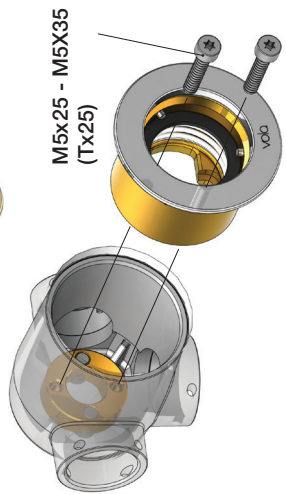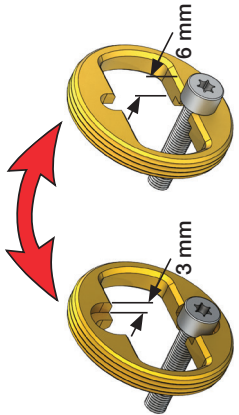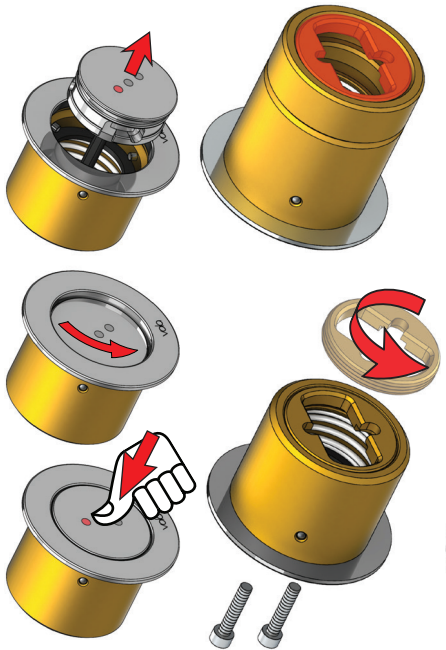

4002L/V:
4003:

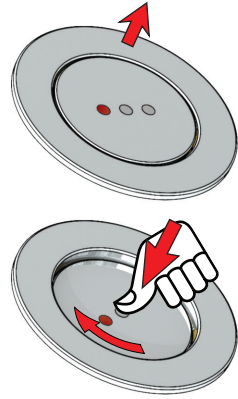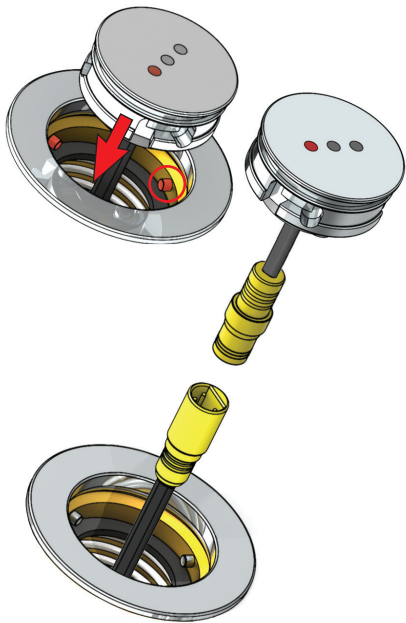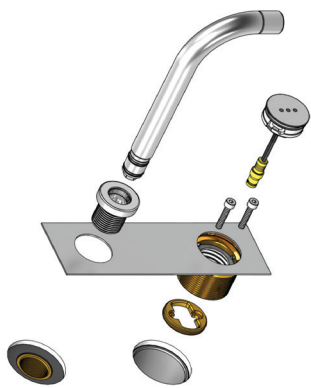

A: 10 - 20 mm = M5x25
A: 20 - 29 mm = M5x35

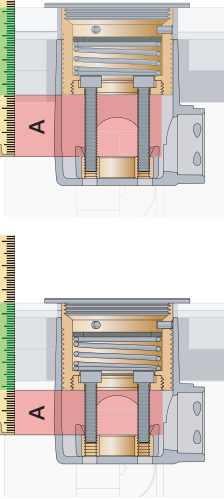

VR513A:						
Tiles: Fliesen: Fliser: Fliser: Tegels: Carreaux:	3 - 15 mm	Standard				
	15 - 25 mm	x1				
	25 - 35 mm					
	35 - 45 mm	x2				
	45 - 55 mm					
	55 - 65 mm	x3				

VOLA Electronic

Elektronikboks

Valve box

Ventil Kasten

Ventilbox


Ventiel doos

Boite étanche avec vanne




EU EMC directive
2004/108/EU
IPX4

VR2618



VR2617



www.vola.com

mnt_Elektronikbox_V10_40999840
17-03-2022

© VOLA A/S




vola

Settings: Einstellung:	Setting: Justering:	Afstelling: Réglage:			
	Sec.	1	2	3	4
DEFAULT SETTING:		ON	ON	ON	ON
ON	0	ON	ON	ON	ON = 20 sec. - hygienic rinse every 24h. - hygienische spülung jede 24 stunde. - hygiejneskyl 24t efter sidste brug. - hygienisk skölja varje 24 timmar. - hygiénisch spoelen iedere 24 uur. - Rinçage hygiénique chaque 24h.
OFF	3	ON	OFF	ON	
	5	ON	OFF	OFF	
	8	OFF	ON	ON	
	10	OFF	ON	OFF	
	15	OFF	OFF	ON	
	20	OFF	OFF	OFF	
SPECIAL: Long spout Lange Auslauf Langt udløb Långt utlopp Lange uitloop Long bec	*0	ON	ON	OFF	


installation requirements:
Installationsanforderungen:

Sunlight or light from halogen lamps can shorten the signal range.
Sonnenlicht oder Licht von Halogenlampen können das Signal verkürzen.
Skarpt sollys eller halogenlys, kan forkorte rækkevidden.
Starkt sollys eller halogenbelysning kan förkorta signalen/känsligheten.
Directe lichtinval van de zon of van halogeen lampen kan het signaal verkorten.
La lumière du soleil ou des lampes à halogène peut perturber le fonctionnement du détecteur.




Krav til installation:
Installationskrav:

No mirroring surfaces opposite the sensor.
Keine spiegelnden Flächen vor dem Sensor.
Ingen reflekterende overflader modsat sensoren.
Inga speglade ytor motsatta sensorn.
Geen spiegelen oppervlakken tegenover de sensor.
Pas de surfaces réfléchissantes opposées du capteur.



Adapter/ Adapteur VR2624 & VR2636

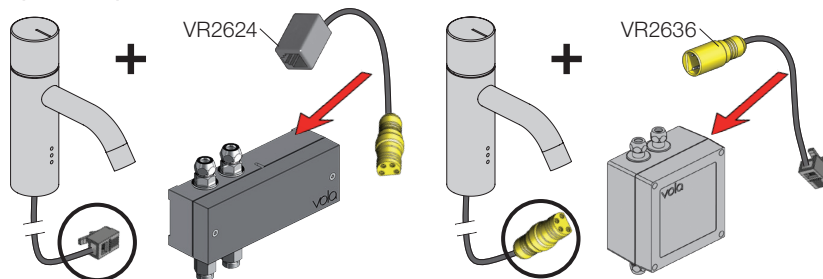

DC Power supply
DC Stromversorgung

DC strømforsyning
DC Nätaggregat

DC voeding
Alimentation électrique

VR2622: ROW & GB 110 - 230V~/50-60Hz
VR2626: EU 9V~/300 mA
VR2623, IPX5: 100 - 240V~/50-60Hz/130mA
9V~/660 mA

VR2622-VR2623-VR2626
VR2624-VR2636:
To be ordered separately
Separat bestillen
Bestilles særskilt
Beställas separat
Apart te bestellen
À commander séparément

VR2622/VR2626: 2 m
VR2623, IP64: 1 m

Battery operation
Batteriebetrieb


Batteridrift
Batteridrift

Batterij bedrijf
Fonctionnement sur batterie


2 x 1.5V AA - FR6 - FR6

Batteries **MUST** be removed if operated by Power supply.
Batterien **MÜSSEN** bei Stromversorgung entfernt werden.
Batterierne **SKAL** fjernes ved brug af strømforsyning.
Batterier **SKAL** tas bort om der anvendes nätaggregat.
Batterijen **MOETEN** worden verwijderd als ze op netvoeding werken.
Les piles **DOIVENT** être impérativement retirées si on utilise l'alimentation électrique.

VR2618

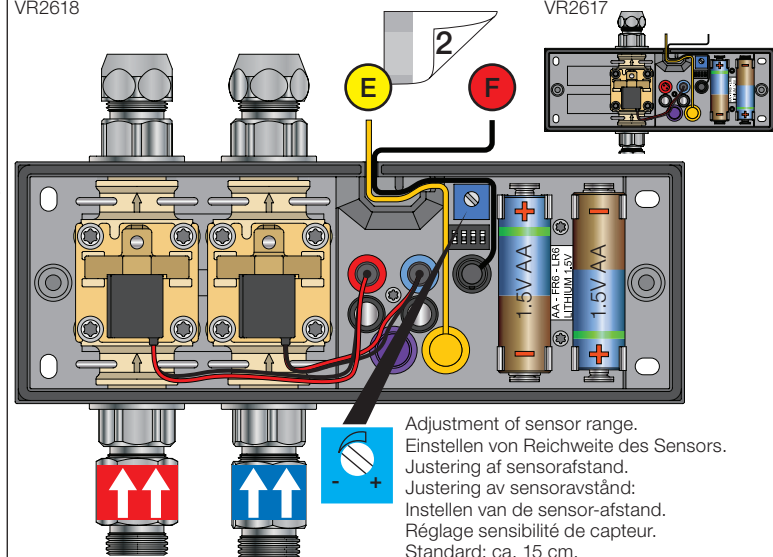

Adjustment of sensor range.
Einstellen von Reichweite des Sensors.
Justering af sensorafstand.
Justering av sensoravstånd:
Instellen van de sensor-afstand.
Réglage sensibilité de capteur.
Standard: ca. 15 cm.

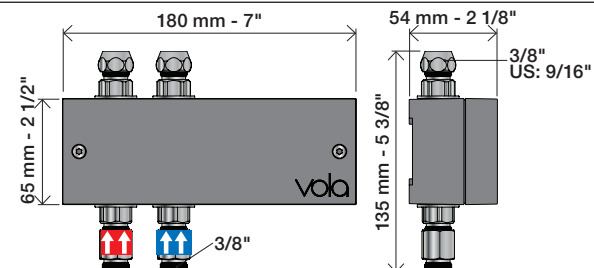

[illegible]

Takmonterad
Plafondmontage
Monté au plafond

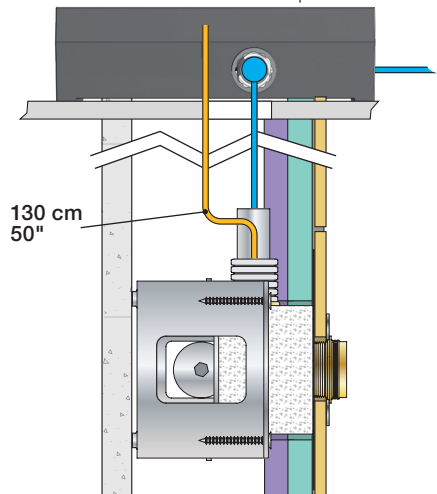


Fig. 5

4000/4100/4300
4800/4900

RB1E/HV1E

1/2" US 1/2" NPT

L = 130 cm
L = 51"

L = 70 cm
L = 27"

1/2"
3/8"

TX20

3/8"

vol

ROW

USA


PEX 15 mm.
Cu + Flex, 10 mm.
VR562 + VR563

Hose 9/16".
Cu + Flex, Nut/Ferrule, 9/16".
VR584 + VR585

VR2622: ROW + GB
VR2623: IPX5
VR2626: EU

Recycling symbol

Diagram showing various components and their connections, including a water meter, valves, and a control unit. The diagram includes a legend for different regions (ROW, USA) and their corresponding components. It also shows a recycling symbol and a warning about the use of the product.

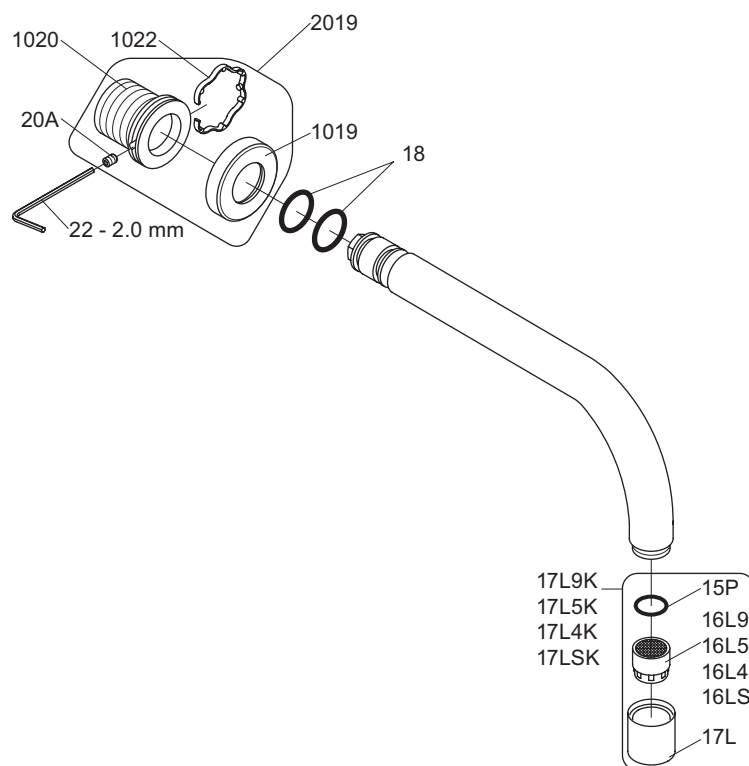

VR17L9K: VR15P, VR16L9, VR17L
 VR17L5K: VR15P, VR16L5, VR17L
 VR17L4K: VR15P, VR16L4, VR17L (US Standard)
 VR17LSK: VR15P, VR16LS, VR17L
 VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



volå


Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@volå.com
 www.volå.com

VOLÅ 010 / 020

Date
Apr. 21


Rev.
3

Sheet
SB11

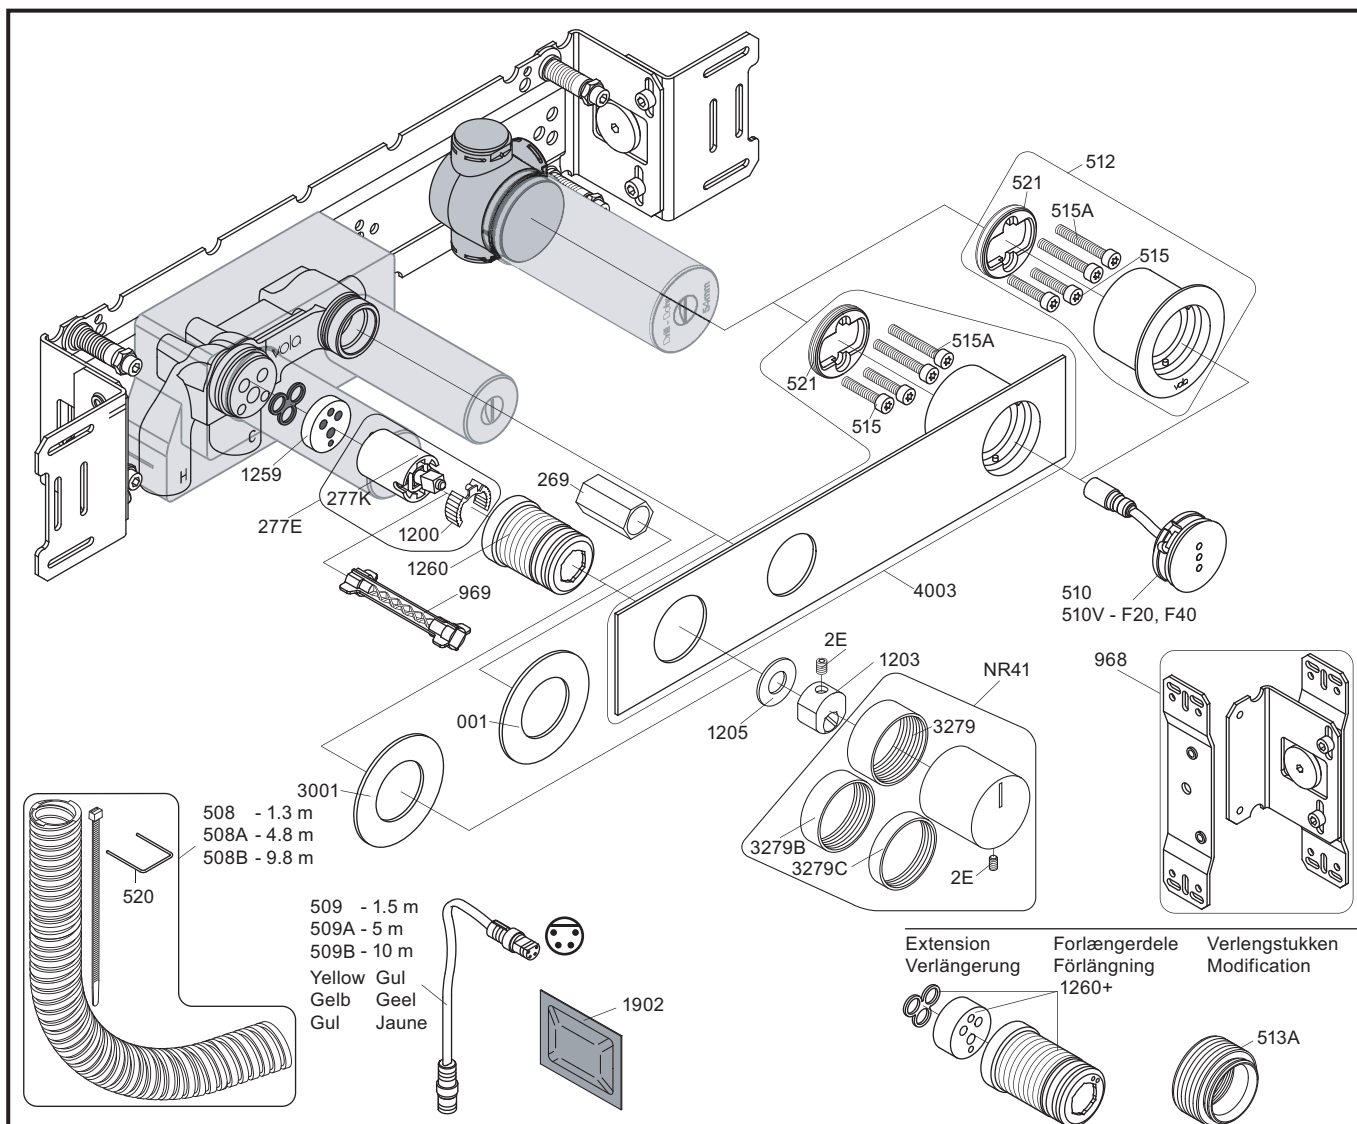

NR12A: VR2E, VR1202A
 VR277E: VR277, VR1200
 VR512: 2xVR515, 2xVR515A, VR521
 VR4003: 2xVR515, 2xVR515A, VR521

4900 2927 2934	4900VS, 4900VSX 2927 2934
4003	-
3001, 001, 512	3001, 001, 512




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 4900
 4900VS, 4900VSX

Date
 Apr. 21

Rev.
 2

Sheet
 SB 40.49

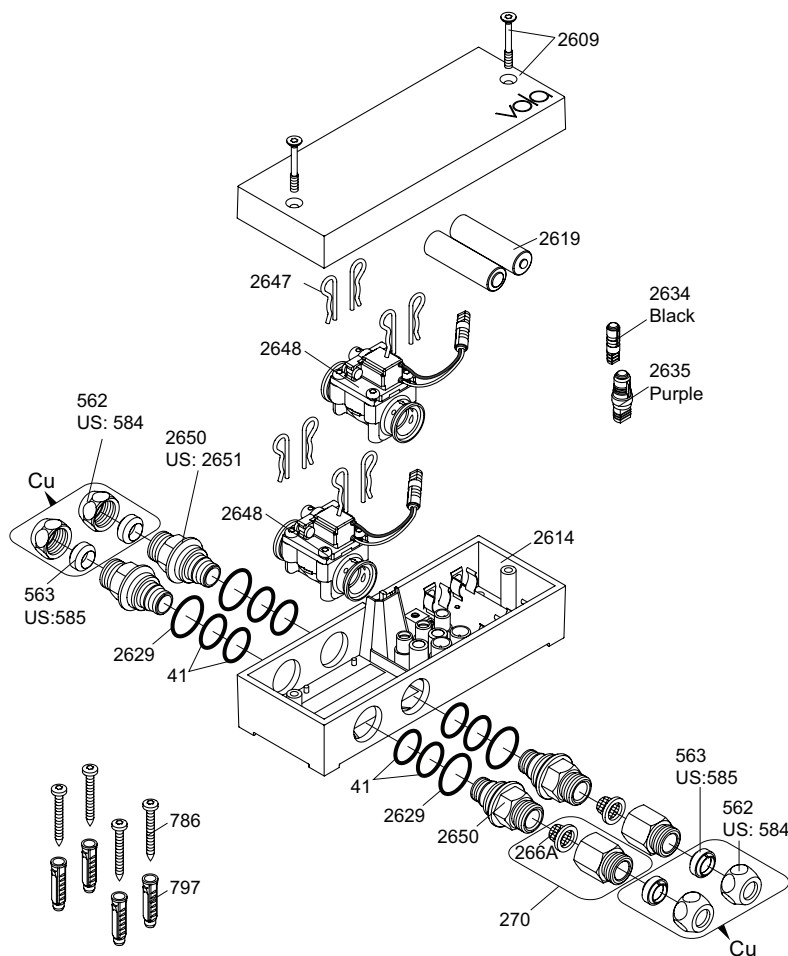

VR2650: 2xVR41, VR2652, VR2629
 VR2651: 2xVR41, VR2652, VR2629 (USA)
 VR2654: 4xVR2647, VR2648, 2xVR2650, 2xVR266A

Additional parts Zusätzliche Teile Supplernde dele Ytterligare delar

Extra onderdelen Pièces supplémentaires Las piezas adicionales

Remote control
Fernbedienung
Fjernbetjening
Fjärrkontroll

Afstandsbediening
Contrôle à distance
Telemando

2625




Power supply
Netzteil
Strømforsyning
Strömförsörjning

Stroomvoorziening
Alimentation
Convertidor adaptador



2622: ROW&GB
2626: EU


	EU	GB	US	AUS
Type:	C	G	A	I



2623: IPX5

Extension

2639 - 5 m
2645 - 10 m



Black
Schwartz
Sort

Svart
Zwart
Noir

Signal cable
Signalkabel

Signaalkabel
Câble de signal
Cable de señal




41XX, 49XX:

509 - 1.5 m
509A - 5 m
509B - 10 m



Yellow
Gelb
Gul
Gul
Geel
Jaune




RB1E, HV1E:
2656 - 1.5 m



247

US: 2601\$

Cu: 221:
Ø10 mm




L 500 mm

L 500 mm


L 350 mm

Adapter
Adapteur

Discontinued model
aufgehörte Modell
Udgået model
Avvecklad modell
Beëindigde model
Modèle discontinué




2624
L 200 mm




RJ10 - 4/4

2636
L 200 mm



RJ10 - 4/4



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

**VOLA VR2618
HV1E/4100/4900**

Date:
Feb. 23

Rev.:
2

Sheet:
SB21.16