


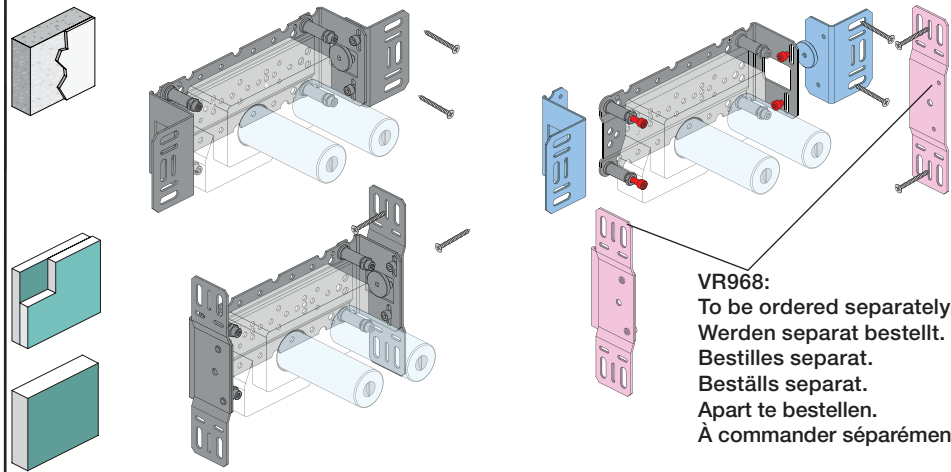

A diagram showing three cylindrical components mounted on a horizontal plate. The middle component has a curved arrow indicating rotation.

voilà

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.


5100/5200V/5300:  5400/5600A3:  - 

5400/5600:  -  5400/5600A4:  - 

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	32/(8.5)		

**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten



Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M

PEX1

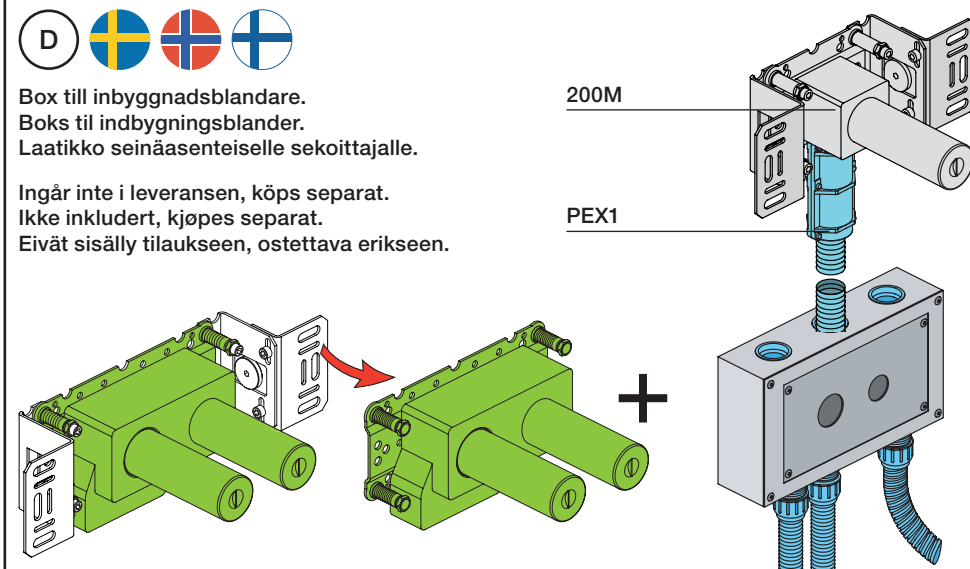


Y Min. 48 mm
Max. 110 mm

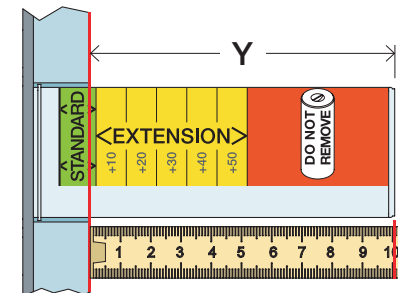

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Montering af forlængerdele
Montering av förlängning

VR5250

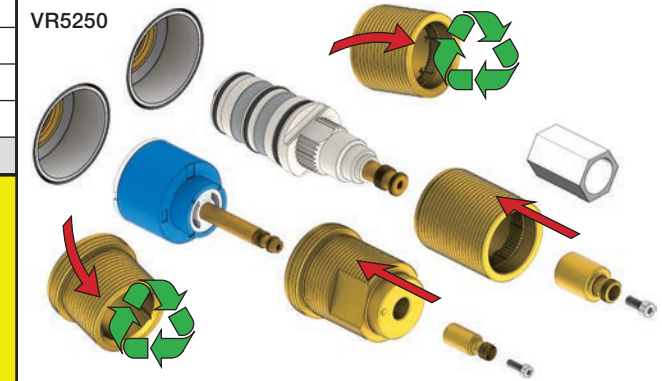

X_{52 - 0 mm}


X_{-15 - 0 mm}



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges


VR2019+, VR2119+

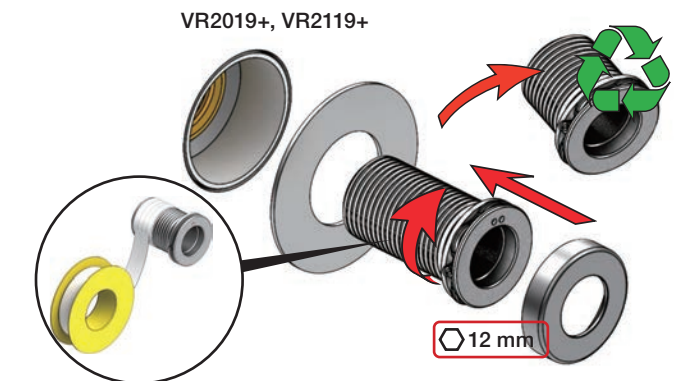


VR5410

A yellow, cylindrical valve with a hexagonal base and a threaded connection.

5400:
5600:

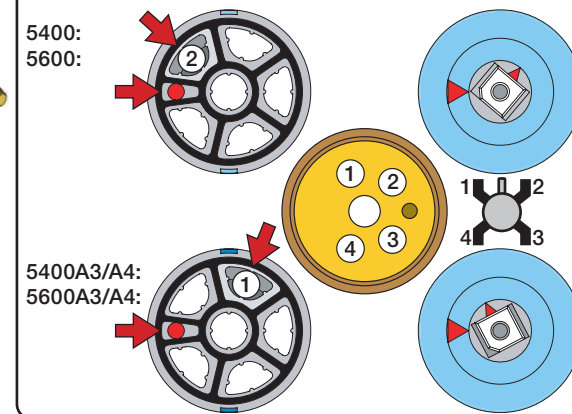


5400/
5600/

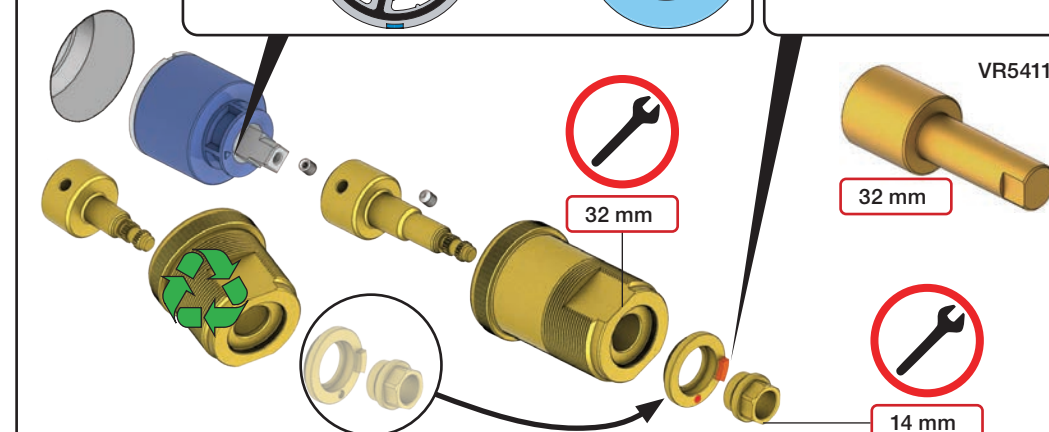

VR5411


5400/5600: 5400A3/ 5600A3: 5400A4:

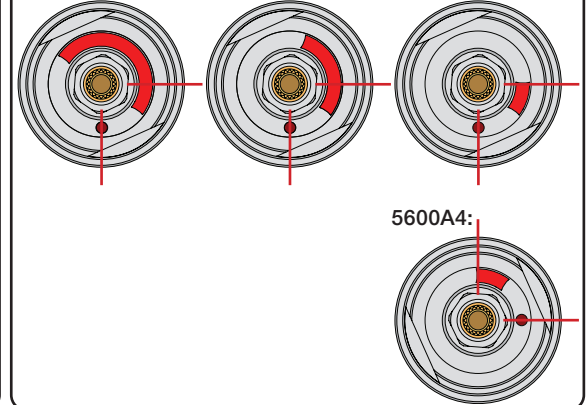

5600A4:


2 mm

14 m

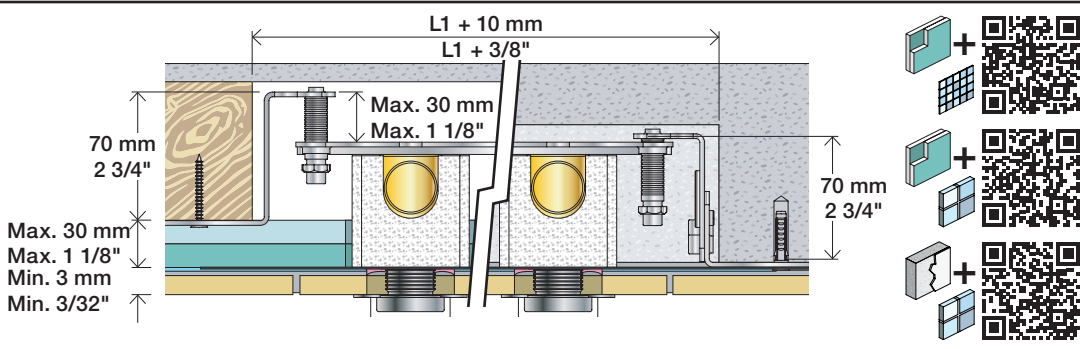

2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

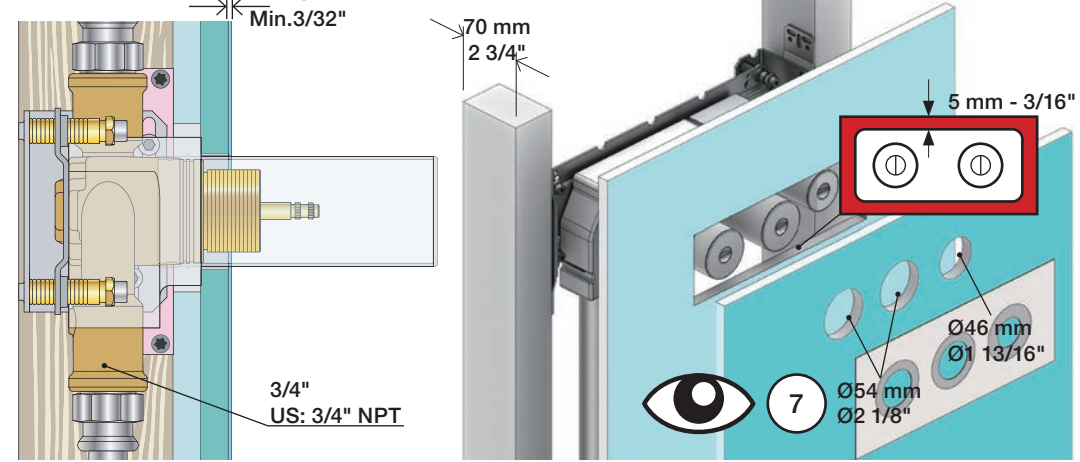

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







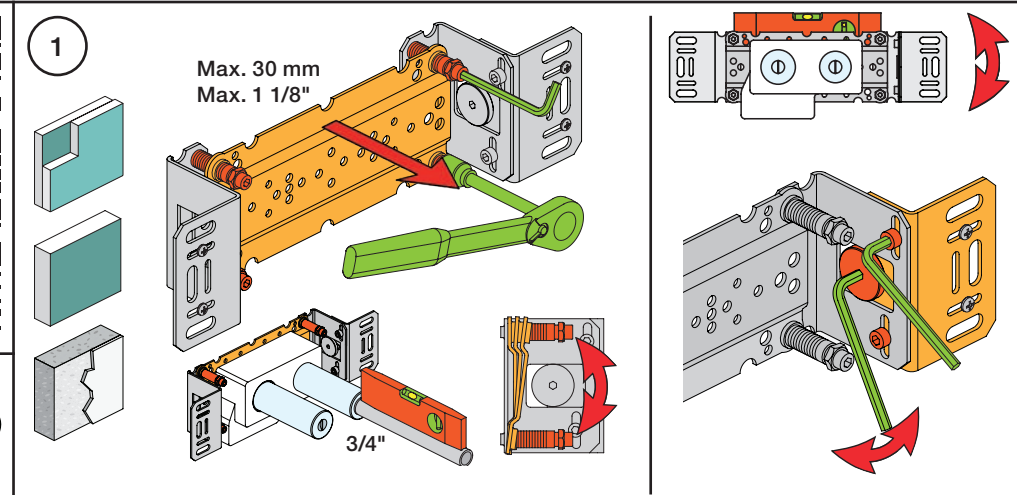


2


Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.


! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

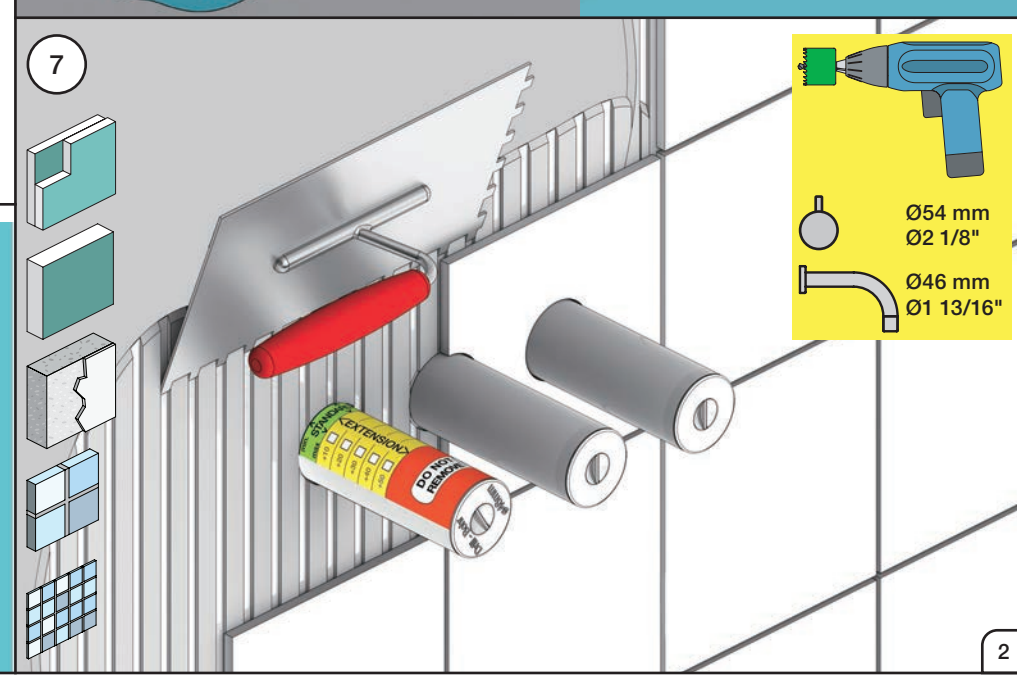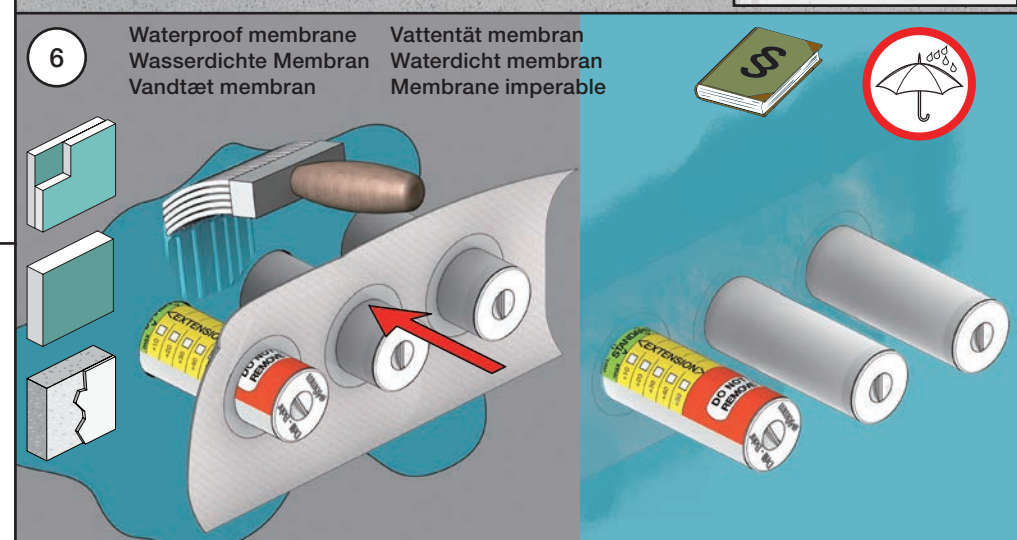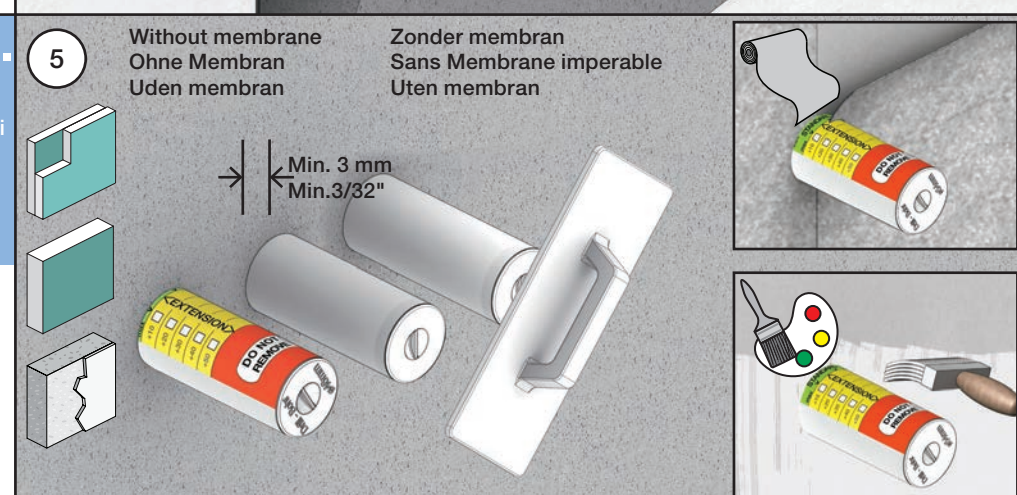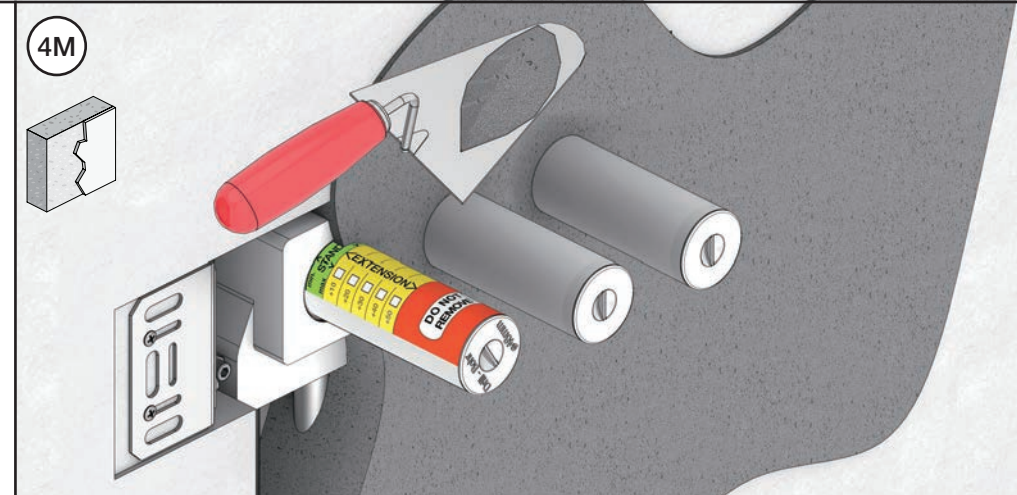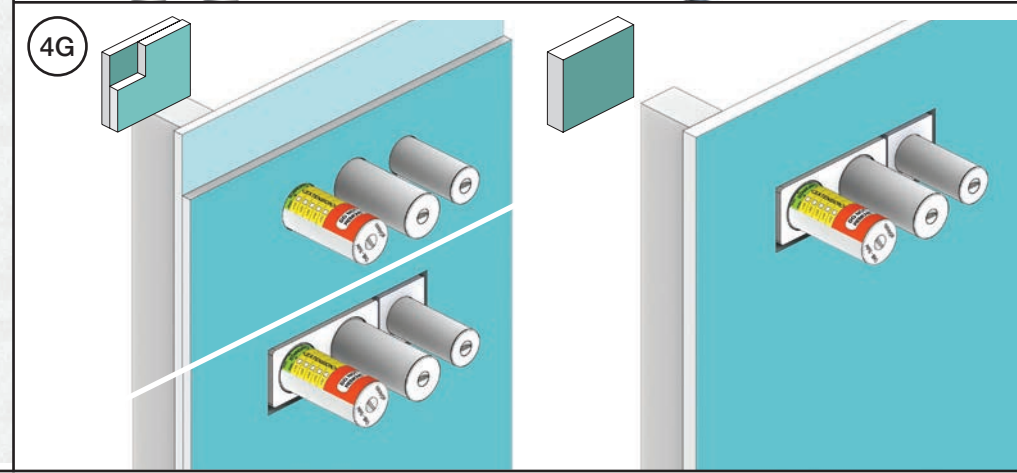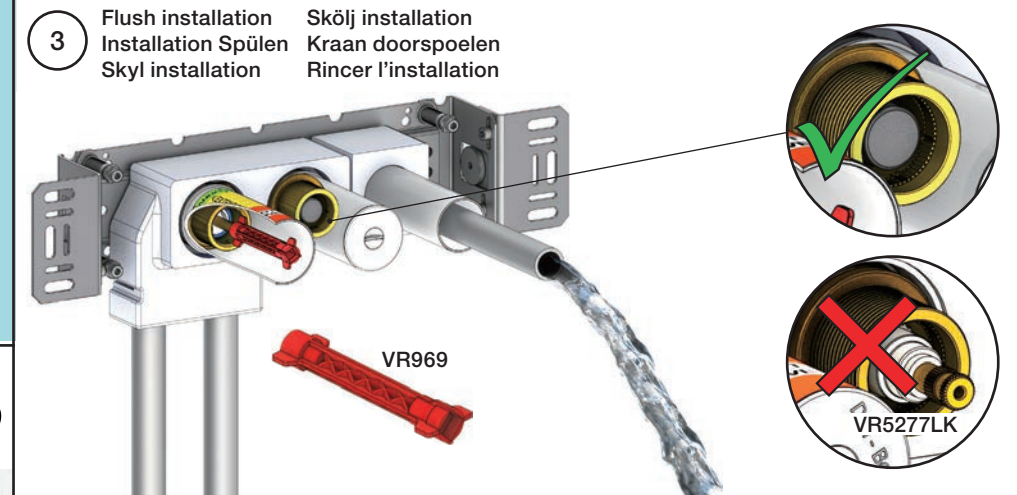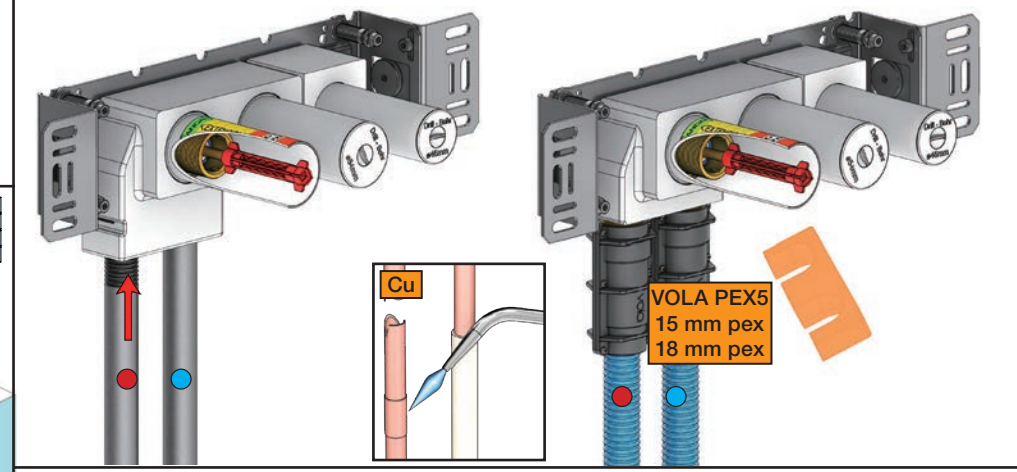


5400VA4

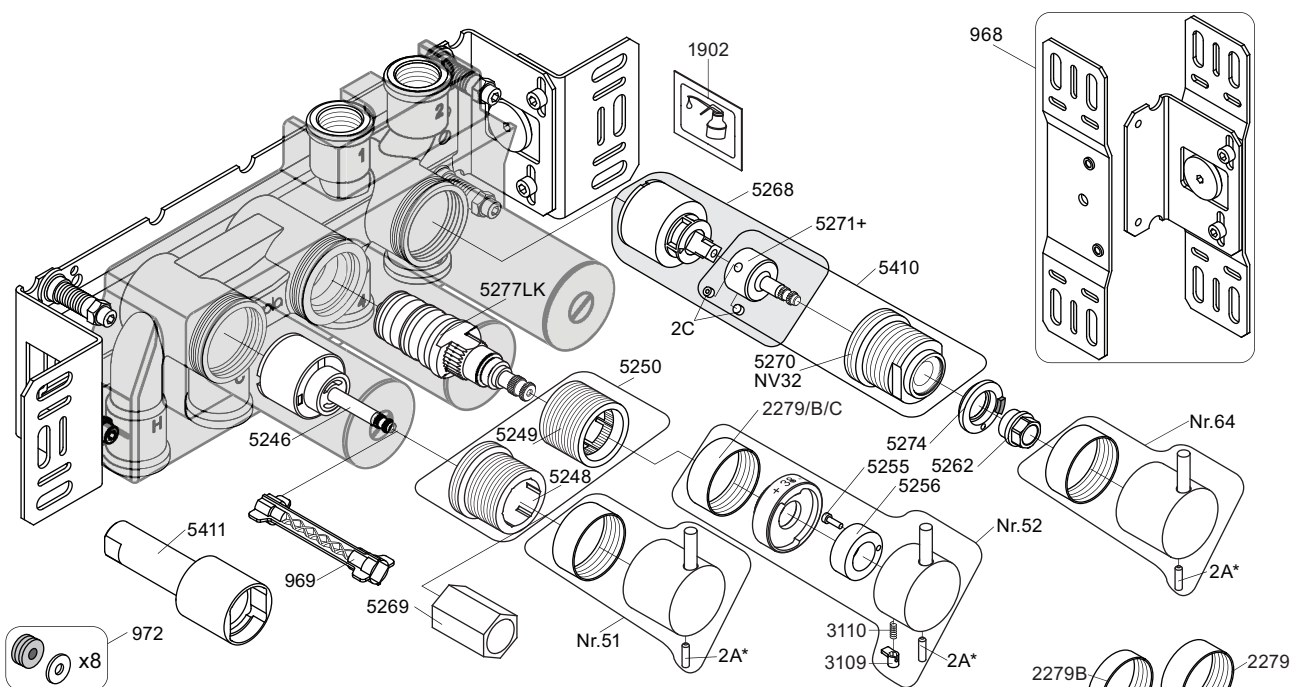


5250+



5410+



5268+



2A* Color

VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51:

NR52:

NR64:

VR3113:

VR5250+:

VR5257+:


VR5258+:

VR5268+:

VR5410+:

VR5251, VR2279+B+C, VR2A
VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR5251, VR2279+B+C, VR2A
VR3109, VR3110, VR5255
VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+, VR5259+
VR5258+, VR5260+
2xVR2C, VR1902, VR5268, VR5271+
2xVR2C, VR5270+, VR5271+

5400VA4
5600VA4

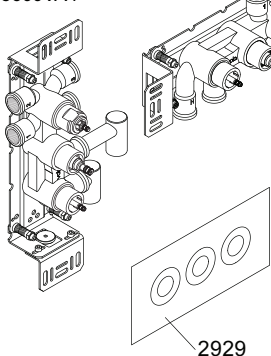


2929

5003B

3x2001

5400NVA4
5400TVA4

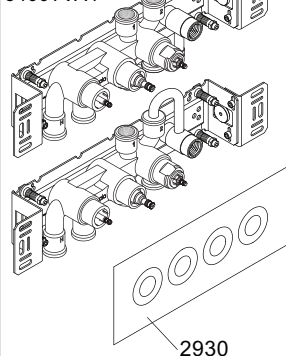


2930

5004B

3x2001, 001

5400FVA4
5400RVA4

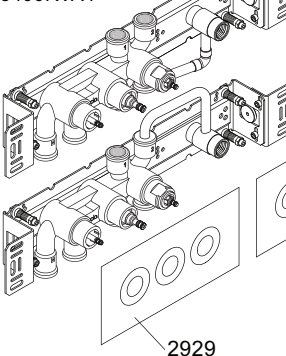


2929

5004L

3x2001, 001

5400DVA4

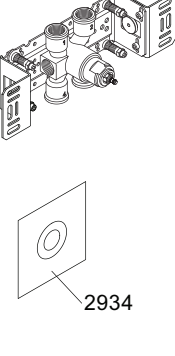

2934

2001



volà
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA4
5400FVA4, 5400NVA4
5400RVA4, 5400TVA4
5600VA4

Date
Apr. 21

Rev.
6

Sheet
SB 10.54